

02-07-00

A

jc644 U.S. PTO



02/04/00

WASHINGTON
202-408-4000

ATLANTA
404-653-6400

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

STANFORD RESEARCH PARK
700 HANSEN WAY
PALO ALTO, CALIFORNIA 94304

TELEPHONE 650-849-6600
FACSIMILE 650-849-6666

TOKYO
011-813-3431-6943

BRUSSELS
011-322-646-0353

Assistant Commissioner for Patents
BOX PATENT APPLICATION
Washington, D.C. 20231

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service's "Express Mail Post Office to Addressee" service under 37 CFR § 1.10, in an envelope addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231 on February 4, 2000.

Express Mail Label No. EL133803745US

Signed: _____

Dawn Stott

jc678 U.S. PTO

09/498609



02/04/00

Re: New U.S. Patent Application Entitled: METHOD AND APPARATUS FOR
IMPLEMENTING A CAMERA MOUSE
Inventors: David L. Hecht, et al.
Filing Date: February 4, 2000
Attorney Docket No.: 07447.0016-00000

Sir:

We enclose the following papers for filing in the U.S. Patent and Trademark Office in connection with the above-identified patent application. Please accord this application a serial number and filing date.

1. An application consisting of 37 pages, including a title page, abstract, 2 independent claims and a total of 32 claims.
2. Drawings consisting of 25 sheets of informal drawings containing 29 Figures (Figs. 1 to 29).

This application is a continuation-in-part of U.S. Patent Application Serial No. 09/456,105, entitled METHOD AND APPARATUS FOR SPATIALLY REGISTERING INFORMATION USING EMBEDDED DATA and filed December 6, 1999.

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

Assistant Commissioner for Patents

February 4, 2000

Page 2

Please accord this application a serial number and filing date.

This application is being filed under the provisions of 37 C.F.R. § 1.53(b) and (f). An executed Declaration and Power of Attorney will be filed after the issuance of a Notice to File Missing Parts, along with the necessary filing and late fees.


Please address all correspondence to **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.** 1300 I Street, N.W., Washington, D.C. 20005, Telephone No. (202) 408-4000.

The Commissioner is hereby authorized to charge any additional fees, other than the filing fees, due under 37 C.F.R. §§ 1.16 or 1.17 during the pendency of this application to Deposit Account No. 06-0916.

Respectfully submitted.

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

By:



David L. Clark

Reg. No.: 37,082

DLC/hlo
Enclosures

001020 66336 100

UNITED STATES PATENT APPLICATION

of

David L. HECHT

L. Noah FLORES

W. Glenn PETRIE

and

Sven KARLSSON

for

METHOD AND APPARATUS FOR
IMPLEMENTING A CAMERA MOUSE

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N. W.
WASHINGTON, DC 20005
202-408-4000

Attorney Docket No.: 07447.0016-00000

CROSS-REFERENCES TO RELATED APPLICATIONS

This application is a continuation-in-part of U.S. Patent Application Serial No. 09/456,105, entitled METHOD AND APPARATUS FOR SPATIALLY REGISTERING INFORMATION USING EMBEDDED DATA and filed December 6, 1999, and is related to U.S. Patent Application Serial No. 09/455,304, entitled METHOD AND APPARATUS FOR DECODING ANGULAR ORIENTATION OF LATTICE CODES and filed December 6, 1999, and is related to U.S. Patent Application Serial No. 09/454,526, entitled METHOD AND APPARATUS FOR DISPLAY OF SPATIALLY REGISTERED INFORMATION USING EMBEDDED DATA and filed December 6, 1999.

BACKGROUND OF THE INVENTION

Apparatus, methods, and articles of manufacture consistent with the invention relate generally to a user input device, and in particular to a user input device for capturing an image of a substrate having embedded data, decoding the embedded data in the captured image, and processing the decoded information.

One type of conventional user input device is a portable device connected to a computer. A user manipulates the device to provide input signals to the computer. A mouse is an example of such a conventional user input device.

The computer responds to the signals by executing operations corresponding to the signals. For a mouse, the signals typically represent movement of the mouse by the user, to which the computer responds by moving a cursor on a display screen, and mouse button activation, to which the computer responds by executing operations, such as selection.

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N.W.
WASHINGTON, DC 20005
202-408-4000

One problem with conventional user input devices is their limited signaling capabilities. For example, a keyboard typically only sends keystroke information to the computer, and a mouse only sends movement and button activation signals. The limited signaling capabilities place inherent limitations on the depth of information a user provides to the computer through the input device.

A camera pen has been proposed in U.S. Application Serial No. 09/144,250, entitled "Methods and Apparatus for Camera Pen," filed on August 31, 1998, which is expressly incorporated herein by reference, for capturing an area of a substrate for further processing. Although the camera pen is useful for capturing an area of a substrate, it has limited user feedback capabilities, and limited capabilities for sending signals to the computer.

What is needed is a user input device and related methods that do not suffer from the limitations of conventional user input devices.

SUMMARY OF THE INVENTION

Apparatus, methods, and articles of manufacture consistent with the present invention provide a user input device for capturing an image of a substrate having embedded data embodied thereon. More particularly, the user input device comprises a camera mouse image capture device that captures an image including embedded code. In one embodiment, the camera mouse includes an active display. The display may provide, for example, a combination of captured image information and information that augments the image. The augmented information is registered with the captured image in the combined display.

Consistent with the principles of the invention, a camera mouse includes an image sensor for capturing an image of a substrate area in response to user selection signals. The image is

decoded to determine address or location information from the captured area and execute a corresponding operation, if necessary. For example, in response to the decoded information, additional information may be displayed on the mouse, or further processing, such as word processing or spreadsheet functions may be performed in response to the decoded information.

5 Additional objects and advantages of the invention will be set forth in part in the description which follows, and in part will be clear from the description, or may be learned by practice of the invention. Objects and advantages of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims. It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate an embodiment of the invention and, together with the description, serve to explain the principles of the invention.

15 Fig. 1 illustrates an overview of the properties of glyph marks and codes embodied in the glyph marks;

Fig. 2 illustrates an embodiment of an image combining graphics and glyphs consistent with the principles of the present invention;

Fig. 3 illustrates an enlarged view of a portion of the image illustrated in Fig. 2;

20 Fig. 4 illustrates an example of a portion of a glyph address carpet code with overlay tiled label code;

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N.W.
WASHINGTON, DC 20005
202-408-4000

Fig. 5 illustrates a system for reading an image having embedded data, decoding the embedded data in the image, and developing human-sensible information based on the decoded embedded data;

Fig. 6 illustrates a configuration of elements consistent with principles of the present invention;

Fig. 7 illustrates another embodiment of a system consistent with the principles of the invention;

Fig. 8 is a diagram illustrating registration of information consistent with the principles of the invention;

Fig. 9 is a diagram of a user interface image capture system that may be used to capture a user-selected portion of a graphical user interface;

Fig. 10 illustrates another embodiment of an camera mouse system consistent with the principles of the invention;

Fig. 11 shows a cutaway side view of the camera mouse shown in Fig. 10;

Fig. 12 illustrates an embodiment of a camera mouse having a display consistent with the principles of the invention;

Fig. 13 illustrates a cutaway side view of the camera mouse shown in Fig. 12;

Fig. 14 illustrates a camera mouse embodiment of an image registration system consistent with the principles of the invention;

Fig. 15 illustrates one embodiment of extended display information provided on a camera mouse consistent with the principles of the invention;

Fig. 16 illustrates highlighting an icon to provide feedback to a user that an icon has been selected;

Fig. 17 illustrates a cursor display superimposed on an analogue captured image of a printer icon with a highlighted abstract view document icon carried with it;

5 Fig. 18 illustrates an analogue captured image of a printer icon with confirmation of document transfer to a printer;

Fig. 19 illustrates cursor drag to a menu choice displayed on the camera mouse;

Fig. 20 shows a document image, a highlighted abstract view icon captured for next action, and an action button;

10 Fig. 21 illustrates one use of the extended display on the camera mouse;

Fig. 22 illustrates a side view of the camera mouse of Fig. 21, showing the extended display along the entire length of the camera mouse;

Fig. 23 is a diagram illustrating the side view of a camera mouse having a display across the entire upper surface of the mouse and an image sensor covering the lower surface;

15 Fig. 24 illustrates a camera mouse on text on an embedded data code;

Fig. 25 shows a camera mouse on text on an embedded data carpet;

Fig. 26 illustrates a camera mouse on text on an embedded data carpet having an extended display view;

Fig. 27 illustrates a full-length display camera mouse on text on an embedded data carpet;

20 Fig. 28 shows a language translation application on a full-length display camera mouse on text on an embedded data carpet; and

Fig. 29 shows a hyperlink application on a full-length display camera mouse.

DETAILED DESCRIPTION OF THE INVENTION

Reference will now be made in detail to embodiments of the invention, examples of which are illustrated in the accompanying drawings. Methods, apparatus, and articles of manufacture disclosed herein consistent with the principles of the invention register first information having embedded data with second information.

Fig. 1 illustrates glyph marks and codes embodied in the glyph marks. Glyph marks are typically implemented as a fine pattern on a substrate, such as glyph marks 21 on substrate 24. Glyph marks are not easily resolved by the unaided human eye. Thus, glyph marks typically appear to the unaided eye as having a uniform gray scale appearance or texture, as illustrated by glyph marks 21 in Fig. 1.

Enlarged area 23 shows an area of glyph marks 21. Glyph marks 21 are comprised of elongated slash-like marks, such as glyph 22, and are typically distributed evenly widthwise and lengthwise on a lattice of glyph center points to form a rectangular pattern of glyphs. Glyphs are usually tilted backward or forward, representing the binary values of "0" or "1," respectively. For example, glyphs may be tilted at +45° or -45° with respect to the longitudinal dimension of substrate 24. Using these binary properties, the glyph marks can be used to create a series of glyph marks representing 0's and 1's embodying a particular coding system.

The glyph marks of enlarged area 23 can be read by an image capture device. The captured image of glyph marks can then be decoded into 0's and 1's by a decoding device. Decoding the glyphs into 0's and 1's creates a glyph code pattern 25. The 0's and 1's of glyph code pattern 25 can be further decoded in accordance with the particular coding system used to create

glyph marks 21. Additional processing might be necessary in the decoding stage to resolve ambiguities created by distorted or erased glyphs.

Glyph marks can be implemented in many ways. Apparatus and methods consistent with the invention read and decode various types of glyph code implementations. For example, glyphs
5 can be combined with graphics or may be used as halftones for creating images.

Fig. 2 illustrates an embodiment of an image 210 combining graphics and glyphs consistent with the present invention. In this particular embodiment, the graphics comprise user interface icons. Each icon comprises a graphic overlaid on glyphs. The glyphs form an address carpet. The glyph address carpet establishes a unique address space of positions and orientations
10 for the image by appropriate coding of the glyph values.

Fig. 3 illustrates an enlarged view of a portion of image 210 illustrated in Fig. 2. More particularly, portion 212 illustrates the Lab.avi icon overlaying a portion of the address carpet, which unambiguously identifies the icon location and orientation.

Fig. 4 illustrates an example of a portion of a glyph address carpet code with overlay tiled label code. The u and v glyph address codes comprise the address carpet, and the d codes
15 comprise the overlay tiled label code. In this embodiment, rows of u address codes are interleaved with rows of v codes. Each row of u address codes is offset by two positions so that a diagonal line running down and to the right at 45° cuts across identical u codes in every other row. Similarly, each row of v address codes is offset by two positions so that a diagonal line running
20 down and to the left at 45° cuts across identical v codes in every other row. This property of the u and v address codes allows determination of the precise location within the code from a captured image of glyphs.

Every sixth column of the address carpet is substituted by d codes, which comprise a label code. A label code may represent additional information, such as a page number or context. The label code in Fig. 4 is a four-bit label code, comprising bits d_{01} , d_{02} , d_{03} , and d_{04} . The d codes repeat throughout the address carpet. The d codes substitute for u and v codes. For example, in the top row, v_{13} , v_{19} , v_{25} , and v_{31} are substituted for d_{03} , d_{04} , d_{01} , and d_{02} , respectively. In each row, the u and v codes in every sixth column are over written by corresponding d codes. In a captured portion of the address carpet, the d codes can be decoded to provide a label providing information. The d codes could represent, for example, a page number or context information. Thus, if the portion of glyph address carpet illustrated in Fig. 4 were read, codes d_{03} , d_{04} , d_{01} , and d_{02} respectively represented 1, 1, 0, 0, the reordered d codes would form a code of d_{01} , d_{02} , d_{03} , and d_{04} , a code of 0011, indicating page or context three (binary 0011 = 3). The proper logical order of the label code elements (i.e., addressing) is provided by the address code.

From the captured portion of the glyph address carpet code having overlay tiled label code as illustrated in Fig. 4, orientation, location, and a label can be determined. The u and v address codes can be used to determine position, as will be explained in greater detail below, and the d codes provide label information.

Apparatus and methods consistent with the invention read embedded data from a substrate, decode the embedded data to determine registration of the substrate relative to a reference in an apparatus, and develop and present human-sensible information based on the registration information. In one embodiment, the human-sensible information is visual information registered with the substrate. The human-sensible information may also comprise, for example, tactile, audible, or other sensory information.

Fig. 5 illustrates a system for reading an image having embedded data, decoding the embedded data in the image, and developing human-sensible information based on the decoded embedded data. More particularly, image capture 470 reads substrate 468 to capture an image having embedded data, decoder 472 decodes the embedded data in the captured image, and information generator 474 develops human-sensible information based on the decoded embedded data, and outputs the information to information output 476, which represents one or more information output devices. The human-sensible information may be visual information registered with substrate 468, and additionally or alternatively may comprise other human-sensible information, such as tactile, audible, or other human-sensible information. User input 478 provides user input signals to image capture 470, decoder 472 and information generator 474. The user input may be used in the functionality of each of these elements. For example, user input 478 could be buttons that when depressed send signals to the devices. The signals are processed by each device and may affect their functionality. For example, a selection signal to image capture 470 may cause image capture 470 to capture an image.

Fig. 6 illustrates a configuration of elements in accordance with principles consistent with the invention. Fig. 6 is an embodiment of the system illustrated in Fig. 5, and will be used to further describe several principles of the invention. An image capture device 70 captures an image from a substrate 68. Substrate 68 has embedded data, such as glyphs, embodied thereon. Image capture device 70 transfers the captured substrate image to a decoder 72 and an image generator 74. In one embodiment, the embedded data on substrate 68 comprises an address carpet and tiled label code. Decoder 72 analyzes the embedded data in the captured substrate image to determine information regarding the registration of the substrate, such as orientation, location, and

label information. These results are transferred to image generator 74 for further processing.

User input 78 provides user input signals to image capture 70, decoder 72, and image generator 74. The user input may be used in the functionality of each of these elements, as described with respect to user input 478 of Fig. 5.

5 Image generator 74 processes the results from decoder 72 and the captured substrate image from image capture device 70. In one embodiment, image generator 74 receives a context code, a location code, and a rotation code from decoder 72. The context code defines a particular context of substrate 68, such as a substrate page number. The location code defines the location on
10 substrate 68 where the captured image was taken from. The rotation gives the orientation of the substrate relative to the image capture device. Using the context code and location code, image generator 74 accesses information related to the context code and location code. For example, if the context code represents substrate page iv, location code indicates location coordinates $x=97$ and $y=92$, and rotation = 43° , image generator 74 retrieves corresponding information and generates an image registered to the substrate. The rotation code enables registering the
15 orientation of the generated image.

 In one embodiment, the retrieved information includes two types of information: image information in the form of a bit map image representation of substrate page iv, and icon information defining the locations and meaning of icons on substrate page iv. Using this information, if the user observes an icon in display 76 that is desired to be selected, the user can
20 provide a selection signal, e.g., via a button. In response, a system attached to the registration system of Fig. 6 (not shown) can use the retrieved meaning of the icon to perform functions corresponding to the icon, as a conventional system would in response to user selection of an icon

on a graphical user interface in a conventional display. Such a system is shown and described in U.S. Patent Application Serial No. 09/223,882 entitled "Multi-Level Selection Methods and Apparatus Using Context Identification for Embedded Data Graphical User Interfaces," which is expressly incorporated by reference.

5 The size and scope of the retrieved information may vary. In one embodiment, image generator 74 retrieves an image of substrate 68 that is the same size as the footprint of display 76 and has the same or similar appearance as the area of substrate 68 directly under the footprint of display 76. Because display 76 is aligned with substrate 68, observer 78 looking at display 76 is given the illusion of looking directly onto substrate 68. Image generator 74 may also add
10 information to the image, or alter the retrieved image before sending it to display 76.

 The image sent to display 76 may be generated by image generator 74 in many ways. For example, image generator 74 may merely pass on the image captured by image capture 70, or a representation of the image captured by image capture 70. For example, a bitmap representation of the entire substrate 68 could be stored locally in image generator 74 or on a remote device, such
15 as a device on a network. In one embodiment, in response to receiving codes from decoder 72, image generator 74 retrieves from the bitmap representation area of image information corresponding to the codes, and forwards the area image information to display 76 for display to a user. The area retrieved by image generator 74 may be the same size as the image captured by image capture 70, or may be an extended view, including not only a representation of the captured
20 area, but also a representation of an area outside the captured area. The latter extended view approach only requires the capture area of image capture 70 to be large enough to capture an image from substrate 68 that includes address codes.

Fig. 7 is a diagram illustrating an embodiment of a system consistent with the principles of the invention. A substrate 89 having embedded data thereon is positioned below a semi-transparent mirror 82. An image from substrate 89 is captured by an image capture device 80. Image capture device 80 sends the captured image to a decoder 88, which decodes the image and determines codes from the captured image. Decoder 88 sends the codes to an image generator 84. Image generator 84 processes the codes, creates and/or retrieves image information based on the codes, and sends the image information to semi-transparent mirror 82. User input 90 may also be used to provide user input signals to image capture 80, decoder 88, and image generator 84, as described above with respect to Figs. 5 and 6.

An observer 86 looking down onto semi-transparent mirror 82 sees the image generated by image generator 84 overlaid on the image from substrate 89. The overlaid information can be dynamically updated and registered with information on substrate 89 based on the decoded image captured by image capture device 80.

In an alternative embodiment, image capture 80 receives the substrate image reflected from semi-transparent mirror 82.

In each of the systems of Fig. 5, Fig. 6, and Fig. 7, the elements may send information to and receive information from network devices, allowing the elements to interact with devices on a network. For example, programs and data may be sent to the elements from network devices, and the devices may send information to the devices on networks. Although each device is illustrated as having its own connection, the devices may also be connected to the network by a common bus.

Fig. 8 is a diagram illustrating registration of information consistent with the principles of the invention. The process may be carried out by the apparatus discussed above. Substrate 364 has embedded code embodied thereon, and may have images, such as a triangle. The embedded code embodies a code system from which x,y positions on substrate 364 can be determined.

5 Other code systems encoding additional types of information may also be used.

An image capture device captures a portion of the embedded code of substrate 364. The embedded code is decoded to determine an x,y location address code encoded in the embedded code, and the orientation of substrate 364, represented by the crosshair arrow on substrate 364. The crosshair arrow is shown for purposes of illustrating orientation, but in practice would not necessarily appear on the substrate. In another embodiment, a label code may also be decoded from the captured embedded code.

10 Based on the x, y location address code and label code, image information 366 is retrieved from storage. The x,y location address code and orientation information decoded from the embedded code embodied on substrate 364 are then used to register image information 366 with substrate 364. These may be used to form a composite image 368.

15 Fig. 9 is a diagram of a user interface image capture system that may be used to capture a user-selected portion of a graphical user interface, such as embedded data glyph user interface substrate 1732, and decode the glyphs in the captured portion. In one embodiment, computer system 1712 is a general purpose computer system, such as a conventional personal computer or laptop computer, that includes main memory 1716, read only memory (ROM) 1718, storage device 1720, processor 1722, and communication interface 1724, all interconnected by bus 1726.

Bus 1726 also connects to registered image system 1754, cursor control 1714, and frame capture 1728.

Registered image system 1754 and camera mouse 1752 may be comprised of a system embodying principles as shown and described with respect to Fig. 5, Fig. 6, and Fig. 7, or other registered image system consistent with the principles of the invention. Registered image system 1754 sends a captured image to frame capture 1728, which provides the captured image to processor 1722. Processor 1722 decodes embedded data in the image to determine information, such as x,y location, label, and orientation information as described above, and sends image information based on the decoded information to registered image system 1754. Registered image system 1754 generates an image registered with the substrate based on the image information from processor 1722.

Registered image system 1754 may receive information from the other devices illustrated in Fig. 9, and may transmit information to the devices. This allows other devices, for example on a network, to interact with registered image system 1754.

Camera mouse 1752 operates in a manner similar to registered image system 1754. Camera mouse 1752 also includes a mechanism for allowing a user of camera mouse 1752 to view the substrate under camera mouse 1752, as described in greater detail below.

Camera pen 1710 and camera mouse 1752 can provide control signals to processor 1722 in conjunction with the operation of registered image system 1754. Additionally, user interface substrate 1732 may be used as the substrate from which registered image system 1754 captures an image.

Camera pen 1710 is connected to frame capture 1728 and camera mouse 1752 and acts as a pointing device. Camera pen 1710 transmits image information to frame capture 1728. In one embodiment, button 1714 of camera pen 1710 is wired to camera mouse 1752 so that when a user presses button 1714 a signal travels to cursor control 1714. The signal causes processor 1722 to run a program that directs frame capture 1728 to capture the image from camera pen 1710. In another embodiment, both the image line and signal line from camera pen 1710 are input directly into frame capture 1728. The lines between camera pen 1710 and computer 1712 can be wired in any way that provides capture of the image from camera pen 1710.

The user makes a selection by placing camera pen 1710 on or near visual indicia on user interface substrate 1732, and pressing button 1714. Pressing button 1714 causes camera pen 1710 to capture the portion of the user interface substrate 1732 under the tip of camera pen 1710, and transmit the image to computer 1712, via frame capture 1728, for analysis. The button 1714, or multiple buttons, can be used for additional signaling, such as a double click or hold down.

Computer 1712 is also connected to local area network (LAN) 1734 for communicating with devices connected to LAN 1734. For example, LAN 1734 may be connected to a computer 1740, a printer 1736, and a mass storage 1738. LAN 1734 may be also connected to a gateway 1742 for connecting to another network 1744. Network 1744 may be connected to a computer 1746, a printer 1748, and a database 1750. By connecting computer 1712 to LAN 1734 and network 1744, computer 1712 can perform operations using the devices connected to these networks. For example, a document selected for printing by camera pen 1710 or camera mouse 1752 can be printed on printer 1736 or printer 1748. Similarly, a user may use computer 1712 to request a file on database 1750.

In one embodiment, main memory 1716 is a random access memory (RAM) or a dynamic storage device that stores instructions executed by processor 1722. Main memory 1716 may also store information used in executing instructions. ROM 1718 is used for storing static information and instructions used by processor 1722. Storage device 1720, such as a magnetic or optical disk, also stores instructions and data used in the operation of computer system 1712.

Display 1730 may be a liquid crystal display (LCD), or other type of display device. Cursor control 1714 controls cursor movement on display 1730. Cursor control 1714 may be, for example, a mouse, a trackball or cursor direction keys.

The system shown in Fig. 9 can be used to implement the glyph address carpet capture and translation system described herein. The apparatus and methods described herein may be implemented by computer system 1712 using hardware, software, or a combination of hardware and software. For example, the apparatus and methods described herein may be implemented as a program in any one or more of main memory 1716, ROM 1718, or storage device 1720. In one embodiment, processor 1722 executes programs which analyze captured portions of embedded data glyphs to determine address information encoded in the glyphs.

Such programs may be read into main memory 1716 from another computer-readable medium, such as storage device 1720. Execution of sequences of instructions contained in main memory 1716 causes processor 1722 to perform the process steps consistent with the present invention described herein. Execution of sequences of instructions contained in main memory 1716 also causes processor to implement apparatus elements that perform the process steps. Hard-wired circuitry may be used in place of or in combination with software instructions to

implement the invention. Thus, embodiments of the invention are not limited to any specific combination of hardware circuitry and software.

The term "computer-readable medium" as used herein refers to any medium that participates in providing instructions to processor 1722 for execution. Such a medium may take many forms, including but not limited to, non-volatile memory media, volatile memory media, and transmission media. Non-volatile memory media includes, for example, optical or magnetic disks, such as storage device 1720. Volatile memory media includes RAM, such as main memory 1716. Transmission media includes coaxial cables, copper wire and fiber optics, including the wires that comprise bus 1726. Transmission media can also take the form of acoustic or light waves, such as those generated during radiowave and infrared data communications.

Common forms of computer-readable media include, for example, a floppy disk, a flexible disk, hard disk, magnetic tape, or any other magnetic storage medium, a CD-ROM, any other optical medium, punchcards, papertape, any other physical medium with patterns of holes, a RAM, a PROM, an EPROM, a FLASH-EPROM, any other memory chip or cartridge, a carrier wave as described hereinafter, or any other medium from which a computer can read and use.

Various forms of computer readable media may be involved in carrying one or more sequences of instructions to processor 1722 for execution. For example, the instructions may initially be carried on a magnetic disk or a remote computer. The remote computer can load the instructions into its dynamic memory and send the instructions over a telephone line using a modem. A modem local to computer system 1712 can receive the data on the telephone line and use an infrared transmitter to convert the data to an infrared signal. An infrared detector coupled to appropriate circuitry can receive the data carried in the infrared signal and place the data on bus

1726. Bus 1726 carries the data to main memory 1716, from which processor 1722 retrieves and executes the instructions. The instructions received by main memory 1716 may optionally be stored on storage device 1720 either before or after execution by processor 1722.

Computer system 1712 also includes a communication interface 1724 coupled to bus 1726. Communication interface 1724 provides two way communications to other systems. For example, communication interface 1724 may be an integrated services digital network (ISDN) card or a modem to provide a data communication connection to a corresponding type of telephone line. Communication may also be, for example, a local area network (LAN) card to provide communication to a LAN. Communication interface 1724 may also be a wireless card for implementing wireless communication between computer system 1712 and wireless systems. In any such implementation, communication interface 1724 sends and receives electrical, electromagnetic or optical signals that carry data streams representing various types of information.

The link between communication interface 1724 and external devices and systems typically provides data communication through one or more networks or other devices. For example, the link may provide a connection to a local network (not shown) to a host computer or to data equipment operated by an Internet Service Provider (ISP). An ISP provides data communication services through the world wide packet data communications network now commonly referred to as the "Internet." Local networks and the Internet both use electrical, electromagnetic or optical signals that carry digital data streams. The signals through the various networks and the signals between the networks and communication interface 1724, which carry

the digital data to and from computer system 1712, are exemplary forms of carrier waves transporting the information.

Computer system 1712 can send messages and receive data, including program code, through the network(s) via the link between communication interface 1724 and the external systems and devices. In the Internet, for example, a server might transmit a requested code for an application program through the Internet, an ISP, a local network, and communication interface 1724.

Program code received over the network may be executed by processor 1722 as it is received, and/or stored in memory, such as in storage device 1720, for later execution. In this manner, computer system 1712 may obtain application code in the form of a carrier wave.

Several embodiments of camera mice consistent with the principles of the invention will now be described. Although particular features may be discussed with respect to one embodiment, one of ordinary skill will recognize that the principles discussed with respect to one embodiment may also be applied to the other embodiments.

Fig. 10 is a diagram illustrating a camera mouse consistent with the principles of the invention. Camera mouse 118 is comprised of camera mouse buttons 110, 112, 114, a semi-transparent mirror 116, and a signal cable 120.

The top of camera mouse 118 has a window through which an observer views substrate 122 through semi-transparent mirror 116. Semi-transparent mirror 116 includes target area indicators, shown in Fig. 10 by a broken line circle and a broken line rectangle. An observer places camera mouse 118 over an area of substrate 122, which has embedded code embodied thereon. A camera (not shown) in camera mouse 118 captures the area of substrate 122 defined

by the target area indicators in response to the observer activating one or more of camera mouse buttons 110, 112, 114. The image captured by the camera can be processed locally in mouse 118 by a processing element or sent over signal cable 120 for processing by a processing element in a device attached to camera mouse 118.

5 Because substrate 122 has embedded data embodied thereon, the embedded data captured in the image can be decoded. Thus, camera mouse 118 allows a user to place camera mouse 118 over a particular area of substrate 122 and capture an image of the area of substrate 122 appearing in the target area indicators. The embedded code in the captured image is then decoded by a processing element to develop one or more codes. The codes may represent information about the
10 substrate, such as context, location, and/or orientation.

 The processing element analyzes the codes and may perform an operation based on the codes, or queue the codes in a syntax queue to await further codes from images captured by camera mouse 118.

 For example, if the user first captures an area of substrate 122 which is decoded to indicate
15 that the location is associated with a particular document icon, this code would appropriately be placed in a syntax queue for later analysis because mere selection of a document icon alone does not constitute a complete operation request from the user. If the user then moves camera mouse 118 over an area of substrate 122 and captures an image which is decoded to represent a printer icon selection, the processing element will analyze this new information in view of the codes in
20 the syntax queue, and determine that the selection of a document icon followed by a printer icon indicates that the selected document should be printed of the printer represented by the associated icon. Therefore, each user selection will typically either result in one or more codes being queued

as part of a series of selections or in performance of an operation because a particular syntax criteria has been satisfied. One or more buttons may be used to signal user selections and actions.

Fig. 11 is a diagram showing a cutaway side view of the camera mouse shown in Fig. 10. Camera mouse 118 includes an illuminator 132, a camera 134, an XY motion sensor 136, and processing element 138. Processing element 138 processes signals for operation of camera mouse 118. For example, processing element 138 may process signals from XY sensor 136, and images from camera 134.

The balance of processing power between camera mouse 118 and an external system may vary. Different embodiments of camera mouse 118 may have correspondingly different processing performed within camera mouse 118 and outside of camera mouse 118. For example, in one embodiment, processing element 138 merely passes signals to a system, such as system 1712 in Fig. 9, and receives signals from system 1712. In yet another embodiment, the elements of camera mouse 118 communicate directly with an external system, such as system 1712, by sending signals to the system and receiving signals from the system. In another embodiment, camera mouse 118 has a complete processor system contained in the mouse. Moreover, although camera mouse 118 is illustrated as being connected via a wired communications link, it may be connected to other devices by any communications technology, including wireless, radio, or infrared.

XY motion sensor 136 provides conventional mouse movement signals to computer system 1712. The movement signals may be used by computer system 1712 in a conventional manner, or be used in conjunction with processing image data from a substrate and to control how information is displayed on a display of camera mouse 118. For example, the mouse movement

signals can be used by computer system 1712 to control a cursor on display 1730 or scroll through a menu displayed on camera mouse 1752.

Illuminators 152 may not be necessary in embodiments where the substrate has sufficient illumination so that an image can be captured therefrom without illumination. For example, in a system where the substrate is backlit or where the substrate is from a view graph projector or computer screen, illuminators may not be necessary. In other embodiments, one or both of illuminator 132 and XY sensor 136 may be removed.

Processing element 138 also processes images from camera 134. Camera 134 receives an image of substrate 122 that is reflected off semi-transparent mirror 116. An observer 130 viewing an image on substrate 122 through semi-transparent mirror 116 may capture the image by pressing one or more of camera mouse buttons 110, 112, or 114. The image of substrate 122 captured by camera 134 is then processed by processing element 138. Although Fig. 11 illustrates processing element 138 located in mouse 118, all or part of the processing may be performed externally by processing elements connected to signal cable 120.

Because substrate 122 has embedded code embodied thereon, the image captured by camera 134 includes an area of the embedded code. This area of embedded code can be decoded and interpreted by a processor. The embedded code covers substrate 122, and each area of embedded code can be decoded into a unique code representing the location. The unique code can then be associated with a particular object selection of the system. A user moves camera mouse 118 over one or more visual representations of system elements, and captures an area on or near the visual representation. As each image is captured, the embedded data in the image is captured and decoded. The decoded result is then analyzed to determine the associated system element.

Once the system element associated with the captured location is determined, it is analyzed along with previously selected system elements, if any, to determine whether any actions should be undertaken. For example, returning to Fig. 10, if the area surrounding the David's Document icon is captured, the processor decodes the embedded code surrounding the icon. The result of the decoding indicates that the captured area is associated with the David's Document icon. This is then used for further processing, as is well understood in user interface design. For example, subsequent to selecting of David's Document icon, the user might press another of camera mouse buttons 110, 112, 114 to open the document associated with David's Document icon, analogous to double clicking an icon on a conventional computer display screen. Thus, mice built using principles consistent with the invention may be used to interact with a substrate in much the same way that a user interacts with a conventional electronic display. For example, the user may move camera mouse 118 over particular icons and select the icons, which is analogous to moving a cursor over an electronic display icon and selecting the icon by pressing a mouse button. Multiple clicks on an icon may result in particular operations being performed, and a sequence of icon selections may result in other operations being performed, analogous to an electronic user interface using a conventional electronic display.

Fig. 12 illustrates an embodiment of a camera mouse having a display consistent with the principles of the invention. In this embodiment, observer 130 views a display 150, such as an LCD screen, located on top of camera mouse 118. Display 150 displays information related to an image captured by camera 134. The information displayed on display 150 may be any type of information related to an image captured by camera 134. Generally, the information is information for assisting the user in operation of camera mouse 118. For example, the information

may comprise the actual image captured by camera 134, a representation of the captured image, the actual image captured in addition to other information related to the captured image, or simply information related to the captured image without the captured image. In Fig. 12, an icon representing David's Document is displayed, which shows the user that camera mouse 118 is positioned above David's Document icon on substrate 122.

Fig. 13 is a diagram showing a cutaway side view of camera mouse 118. Camera mouse 118 includes a camera 134, an XY motion sensor 136, illuminators 152, and processing element 138. Processing element 138 processes signals from XY motion sensor 136 and images from camera 134. The images may be processed locally, sent to computer system 1712, or a combination of the two.

Camera 134 receives an image of substrate 122 reflected off mirror 116. An observer 130 viewing an image on display 150 may make a selection by pressing one or more of camera mouse buttons 110, 112, or 114. The area of substrate 122 captured by camera 134 is then processed by processing element 138. Although Fig. 13 illustrates processing element 138 located in mouse 118, all or part of the processing may be performed externally by processing elements connected to camera mouse 118 by signal cable 120.

Fig. 14 illustrates another embodiment of an image registration system consistent with the principles of the invention. Camera mouse 118 is comprised of camera mouse buttons 110, 112, 114, and a signal cable 120. A camera (not shown) in camera mouse 118 captures the area of substrate 122 defined by the target area indicators in response to the observer activating one or more of camera mouse buttons 110, 112, 114. The image captured by the camera can be

processed locally in mouse 118 by a processing element (not shown) or sent over signal cable 120 for processing by a processing element in a device attached to camera mouse 118.

Because substrate 122 has embedded data embodied thereon, the embedded data captured in the image can be decoded. Thus, camera mouse 118 allows a user to place camera mouse 118 over a particular area of substrate 122 and capture an image of the area of substrate 122, which is then displayed in display 150. The embedded code in the captured image is decoded by a processing element to develop decoded information. The decoded information may represent information about the substrate, such as context, location, and/or orientation. The processing element analyzes the decoded information and may perform an operation based on the decoded information and button controls, or queue the codes and button controls in a syntax queue to await further codes and button controls.

Based on the decoded information, image information is generated and displayed as an image on display 150. Several types of image information may be displayed. For example, the information may comprise the actual image captured by camera 134, a representation of the captured image, the actual image captured in addition to other information related to the captured image, or simply information related to the captured image without the captured image. In one embodiment, a representation of the substrate is retrieved and combined with the captured image to form a composite image on display 150 that shows the captured image and the extended area surrounding the captured image.

Display 150 shows David's Docum icon, which is the captured image, with superimposed cross hairs. Display 150 also shows an image 250 of David's Docum, indicating that icon has been selected by the user. For example, if the user places the mouse over David's Docum, the

mouse captures the image of David's Docum from substrate 122, and displays the captured image on display 150. If the user then activates a mouse button to select the icon, a representation of the David's Docum icon is displayed in display 150 as David's Docum icon 250.

Fig. 15 is a diagram illustrating another embodiment of display information on a camera mouse display. Figs. 15-19 illustrate a series of user selections illustrating an example of using camera mouse 118 to cause a system to perform particular functions. Display 150 displays a larger image capture field, which includes a broken line circle, a broken line rectangle, and a cross hair cursor, shown by crossing broken lines. Unlike Fig. 12, where only the capture area within the rectangular box is displayed, Fig. 15 illustrates displaying a larger area representing substrate 122 on display 150. The user selects the icon in the target area for capture by pressing one of camera mouse buttons 110, 112, 114.

Fig. 16 illustrates highlighting an icon on the display to provide feedback to a user that an icon has been selected. More particularly, after user selects the David's Document icon, the selection is highlighted in display 150, for example, by showing the icon in a different color.

Fig. 17 illustrates a cross hair cursor superimposed over an image of a printer icon with a highlighted abstract view of document icon 250 carried with it. Continuing from the point of the selection being highlighted as illustrated in Fig. 16, once the icon is highlighted, it can be selected for further processing by pressing one of camera mouse buttons 110, 112, 114. This action causes David's Document icon 250 to appear in the lower-right corner of display 150, which indicates that the icon has been selected for next action. By moving camera mouse 118 over substrate 122 until the printer icon appears under the cross hairs on display 150, and activating one of camera mouse buttons 110, 112, 114, microcamera 134 captures the printer icon image from substrate

122, and the embedded data in captured image is processed by processing element to determine that an area associated with a printer icon has been captured. Because icon 250 captured for next action is a document icon, the processing element directs the system connected to camera mouse 118 printing the document associated with document icon 250 on the printer associated with the captured printer icon.

Fig. 18 illustrates a camera mouse display confirming a document has been transferred to a printer. Once camera mouse 118 has been moved so that the printer icon is in the cross hairs of display 150, and the user selects the printer icon, such as by depressing a mouse button, the system provides feedback in display 150 in the form of text, notifying the user that David's Document has been delivered to the printer associated with the selected printer icon.

Fig. 19 illustrates a cursor scroll drag operation to select a menu choice. Menu choices are displayed on display 150 and scrolled through, in a similar fashion to a pull down menu on a conventional computer electronic display screen. The user may scroll through the displayed menu choices in a variety of ways. For example, the user may scroll through the menu choices by moving camera mouse 118, causing the mouse ball to move, sending XY motion signals to the computer, which in turn causes camera mouse 118 to provide a visual indication on display 150 that selections are being scrolled through. Alternatively, the mouse buttons can be used. For example, the right and left mouse buttons can be used to scroll through the menu choices and the middle key can be used to select the desired menu choice. Thus, the user can be presented with a variety of menu choices and select the desired menu choice.

Fig. 20 is a diagram illustrating a camera mouse cursor superimposed on text of a document a highlighted icon captured for next action. By selecting an icon and then opening it,

information associated with the icon can be displayed on display 150. For example, if David's Document icon 250 is selected and opened, the text of the document can be displayed on display 150 for review by the user. Thus, display 150 of camera mouse 118 can be used both as a way to interact with the embedded code on substrate 122 as well as view information associated with the images captured from substrate 122. The user can close the opened document by selecting close button 252. For example, mouse button 116 could be used to activate close button 252 to close the display of text and display 150.

Fig. 21 is a diagram illustrating an image capture field boundary and cursor displayed on an extended view, with a highlighted selected icon. By using larger display screen, the user can view not only a representation of the underlying substrate captured by the microcamera, but may also view other information in a window 194. Window 194 may display any information associated with use of mouse 118, or other information, such as advertising. For example, window 194 may include the text of a document associated with a particular icon, command buttons, such as close button 252, or captured icons, such as David's Document 250.

Fig. 22 illustrates a side view of the camera mouse of Fig. 21, showing display 192 extended along the entire length of the camera mouse.

Fig. 23 is a diagram illustrating the side view of a camera mouse capable of capturing and displaying the entire area of substrate 122 under the mouse. Camera mouse 118 includes circuits 280 running across the entire length and width of camera mouse 118. Circuits 280 are connected to illuminators 282, which illuminate image capture sensor 284. Capture sensor 284 receives the image from substrate 122 and sends the image information to circuits 280 for display on all or a portion of full length display screen 192. By capturing the entire substrate image under the

footprint of camera mouse 118, the user may be presented with more information regarding the area of substrate 122 under the mouse.

Fig. 24 illustrates a camera mouse on text on embedded data, illustrating a text print GUI. Camera mouse 118 is positioned over embedded data carpet 300, which includes several lines of text thereon. The user positions camera mouse 118 until a particular area of interest is displayed in the cross hairs of display 150. Further operations may then be performed on the selected area.

Fig. 25 is a diagram illustrating a camera mouse on embedded data. More particularly, Fig. 25 illustrates an example of a coding scheme of substrate 300. The codes are shown for purposes of illustration only. An implementation of the system would implement the code in glyphs. The broken line capture area of display 150 illustrates the codes that are captured as a result of the capture of the image surrounding the letters "conv." By capturing the image, the processing element in camera mouse 118 can determine which area of the glyph address carpet 300 the captured image is from, and perform further operations based on the determination.

Fig. 26 is a diagram illustrating a camera mouse on text on an embedded data illustrating a text print GUI.

Fig. 27 is a diagram illustrating a camera mouse on text on an embedded data carpet. More particularly, Fig. 27 illustrates a mouse having a full length and full width display for displaying information corresponding to the substrate beneath the camera mouse. This allows a user of the camera mouse to visualize the entire area under the footprint of the mouse.

Fig. 28 is a diagram illustrating a translation on a full width camera mouse on text on an embedded carpet. In this embodiment, the user positions the mouse over a particular area of interest, in this case, the letters "critica", captures the area of interest on embedded data 300 by

depressing a mouse button, and processes the captured image. The embedded codes in the captured area of interest are decoded to determine which location was selected. Based on the decoded information, the processing element determines that the word of interest is the word "critical", which is then translated by the processing element and the translation is shown in window 210 on the camera mouse. Window 210 may display types of information other than translation information as well. For example, window 210 may provide synonyms of the word or other information related to the text.

Fig. 29 is a diagram illustrating a hyperlink application on a large display camera mouse on text with embedded data. More particularly, Fig. 29 illustrates the use of other information related to the captured area of interest. In the example shown in Fig. 29, the area of interest on embedded data carpet 300 is the word "Xerox." Window 220 displays information related to Xerox, in this example the Xerox home page, and window 222 shows information defining what is being displayed, in this example a hyperlink into the Xerox web page. The user may then selectively request more information based on the information in windows 220 and 222 by moving the mouse and activating the mouse buttons on either side of the mouse for further selections.

CONCLUSION

Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the disclosed embodiments. The specification and examples are exemplary only, and the true scope and spirit of the invention is defined by the following claims and their equivalents.

What is Claimed is:

1. An apparatus for capturing information from a substrate, comprising:
means for providing a viewing area for assisting a user in positioning the
apparatus over a particular area of the substrate; and
means for capturing coded embedded data related to the particular area of the
substrate.

2. The apparatus of claim 1, further comprising
means for decoding the coded embedded data to develop a code indicating the
relative position of the apparatus and the substrate.

3. The apparatus of claim 1, wherein the viewing area comprises a semi-transparent mirror.

4. The apparatus of claim 1, wherein the viewing area comprises a display
for displaying an image based on the coded embedded data.

5. The apparatus of claim 1, wherein the image comprises information
registered with the viewing area.

6. The apparatus of claim 4, wherein the image comprises a representation of
an area of the substrate.

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N. W.
WASHINGTON, DC 20005
202-408-4000

7. The apparatus of claim 4, wherein the image comprises information based on a user selection.

8. The apparatus of claim 4, wherein the image comprises information related to the substrate.

9. The apparatus of claim 1, wherein the means for capturing coded embedded data comprises a camera.

10. The apparatus of claim 1, further comprising means for providing user input signals.

11. The apparatus of claim 1, further comprising means for creating signals indicating relative movement of the apparatus and substrate.

12. The apparatus of claim 1, further comprising illumination means for illuminating the substrate.

13. The apparatus of claim 1, further comprising:
means for generating visual information registered with the first information based on the code.

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N. W.
WASHINGTON, DC 20005
202-408-4000

14. The apparatus of claim 13, wherein the means for generating comprises:
means for creating image information based on information from the means for
decoding.

15. The apparatus of claim 14, wherein the means for generating further
comprises:
means for combining the created image information with a captured image of the
substrate.

16. The apparatus of claim 1, wherein the coded embedded data is a glyph
code.

17. A method for capturing information from a substrate using an apparatus
having a viewing area for assisting a user in positioning the apparatus over a particular
area of the substrate, comprising:

positioning the apparatus over a particular area of the substrate using the viewing
area; and

capturing coded embedded data related to the particular area of the substrate.

18. The method of claim 17, further comprising
decoding the coded embedded data to develop a code indicating the relative
position of the apparatus and the substrate.

19. The method of claim 17, wherein the viewing area comprises a semi-transparent mirror.

20. The method of claim 17, further comprising displaying an image based on the coded embedded data.

21. The method of claim 20, wherein the image comprises information registered with the viewing area.

22. The method of claim 20, wherein the image comprises a representation of an area of the substrate.

23. The method of claim 20, wherein the image comprises information based on a user selection.

24. The method of claim 20, wherein the image comprises information related to the substrate.

25. The method of claim 17, further including capturing coded embedded data comprises a camera.

26. The method of claim 17, further including providing user input signals.

27. The method of claim 17, further including creating signals indicating relative movement of the apparatus and substrate.
28. The method of claim 17, further including illuminating the substrate.
29. The method of claim 17, further including generating visual information registered with the first information based on the code.
30. The method of claim 29, wherein the step of generating includes creating image information based on information from the means for decoding.
31. The method of claim 30, wherein the step of generating further includes combining the created image information with a captured image of the substrate.
32. The method of claim 17, wherein the coded embedded data is a glyph code.

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N. W.
WASHINGTON, DC 20005
202-408-4000

ABSTRACT

A mouse incorporating a camera captures an image of embedded data from a substrate under the mouse. The embedded data in the image is decoded to determine address or location information coded in the embedded data. Based on the decoded information and other user input signals, such as mouse button selection signals, the computer executes operations. The mouse also has a display controlled by the computer for providing visual feedback to a user. The display might generate an image of the substrate area under the mouse, making it appear to the user as if they are looking through the mouse directly onto the substrate. The display may also generate visual feedback regarding operations occurring in the computer, such as selection or other computer operations.

U.S. PATENT & TRADEMARK OFFICE

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N.W.
WASHINGTON, DC 20005
202-408-4000

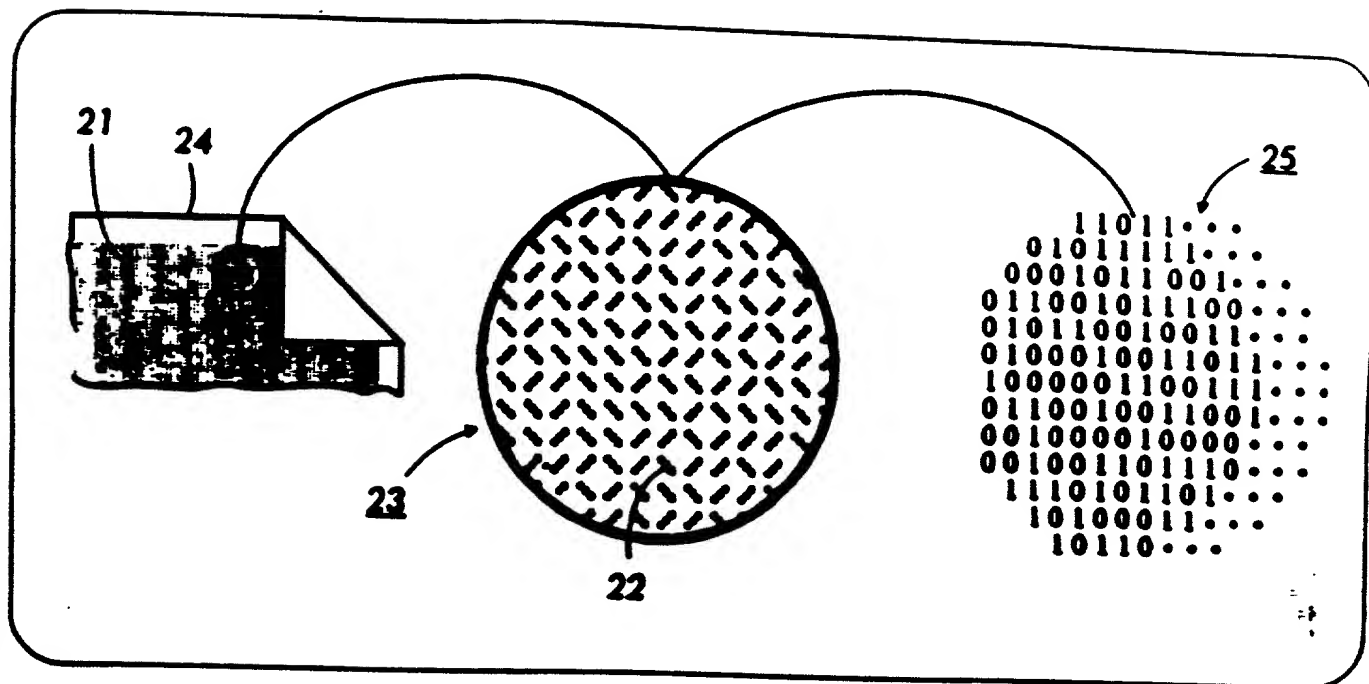


FIG. 1

210



Fig. 2

212

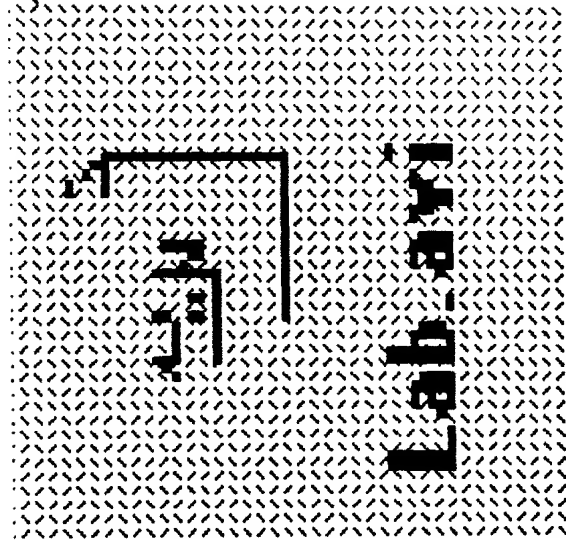


Fig. 3

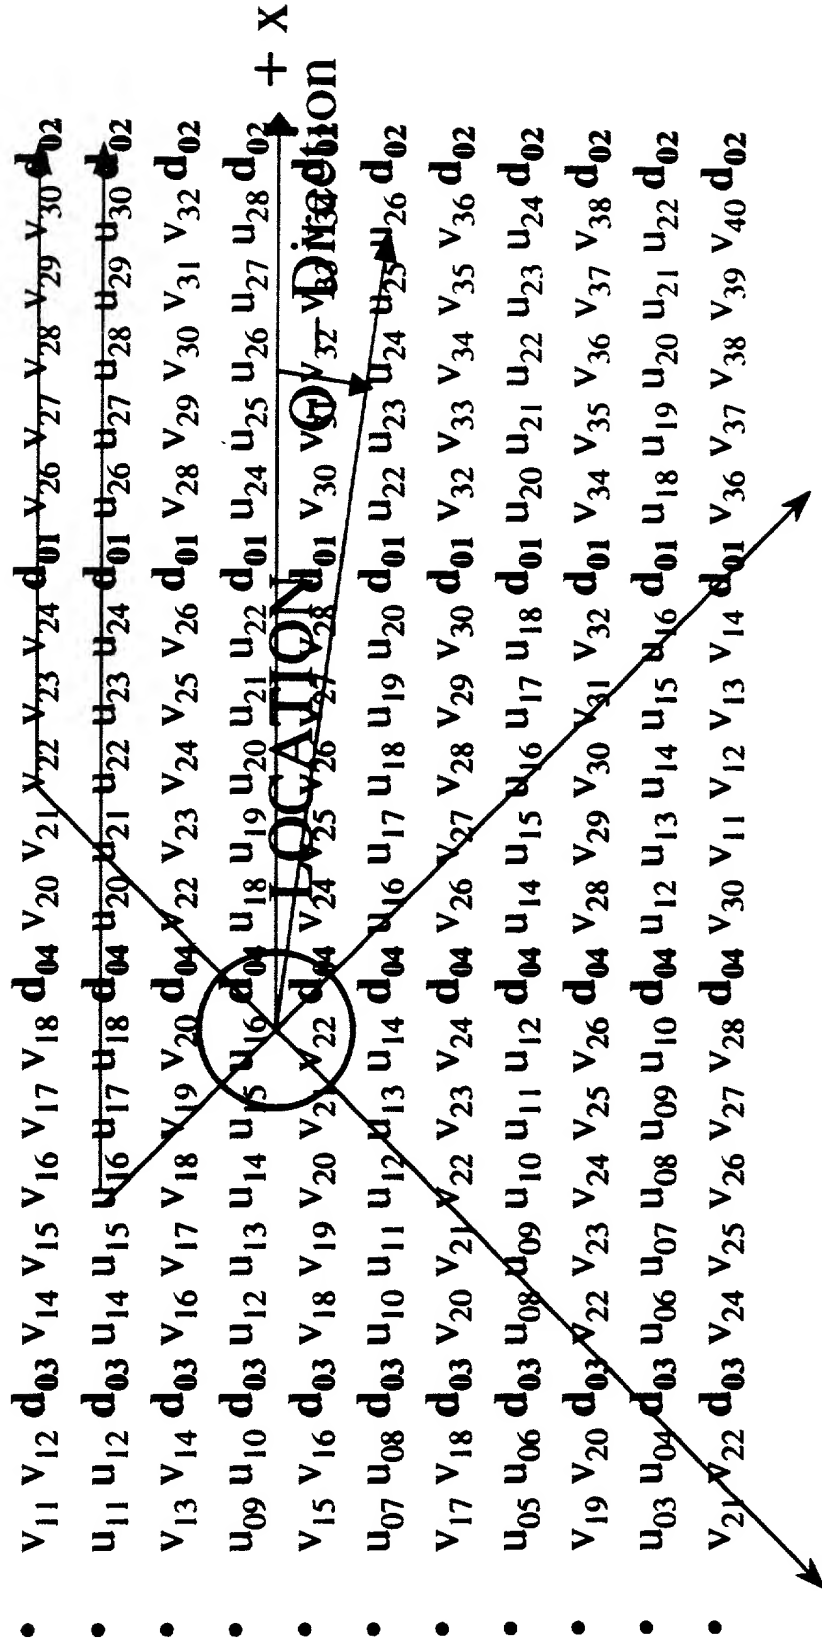


Fig 4

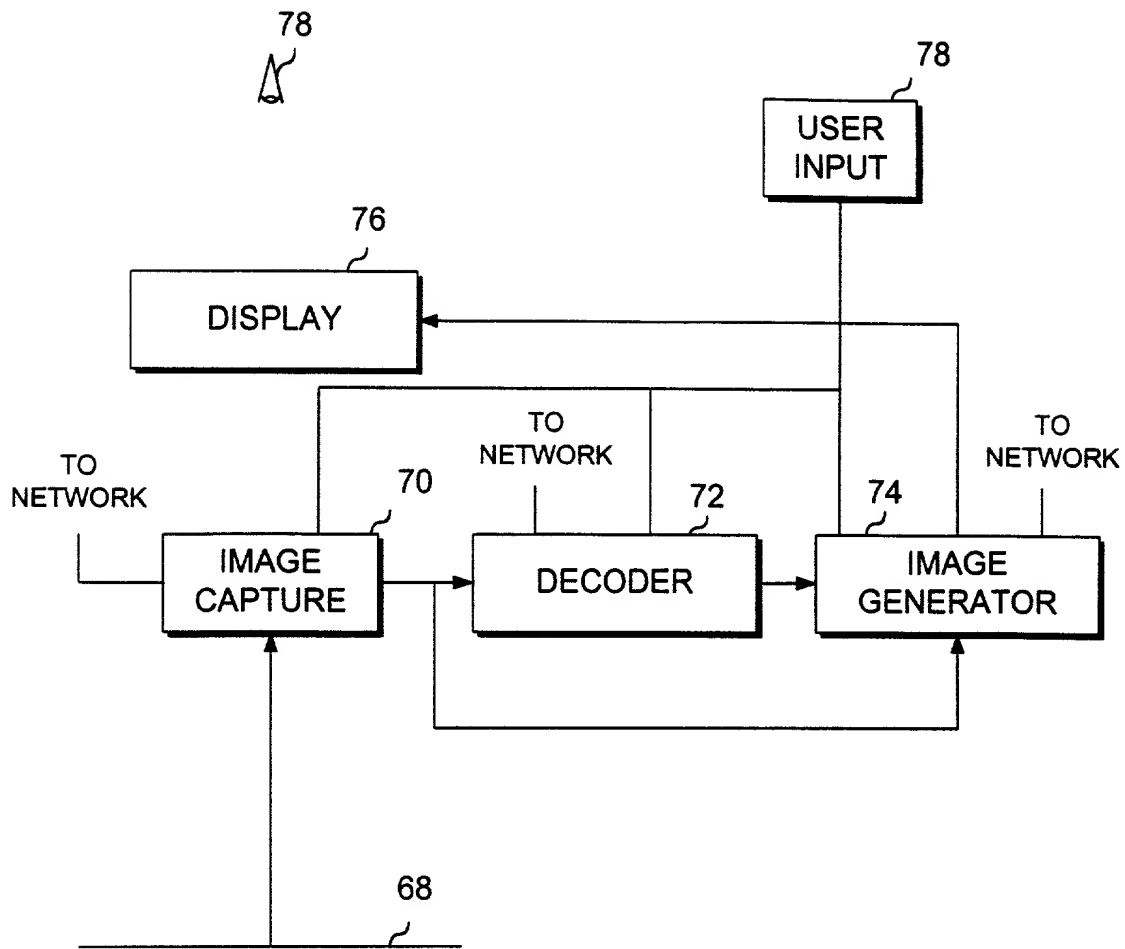


Fig. 6

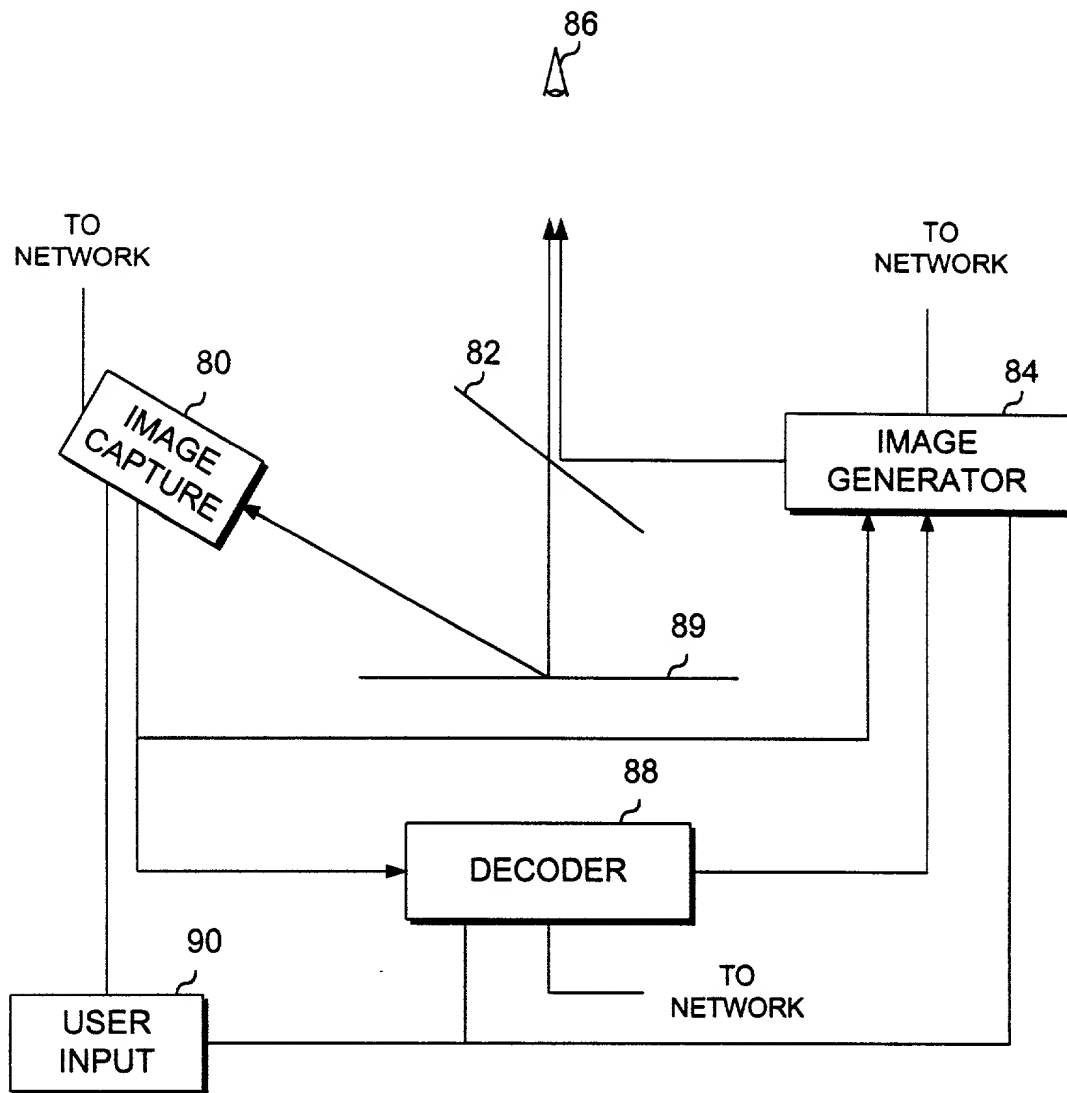


Fig. 7

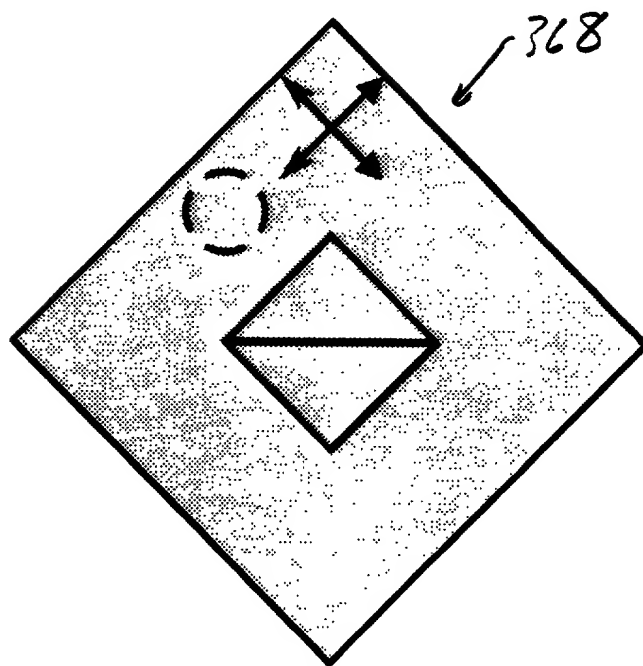
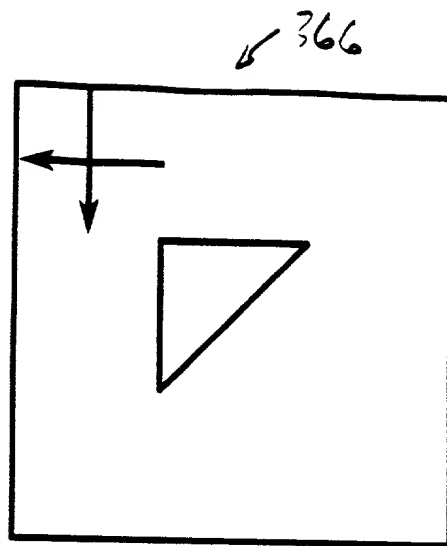
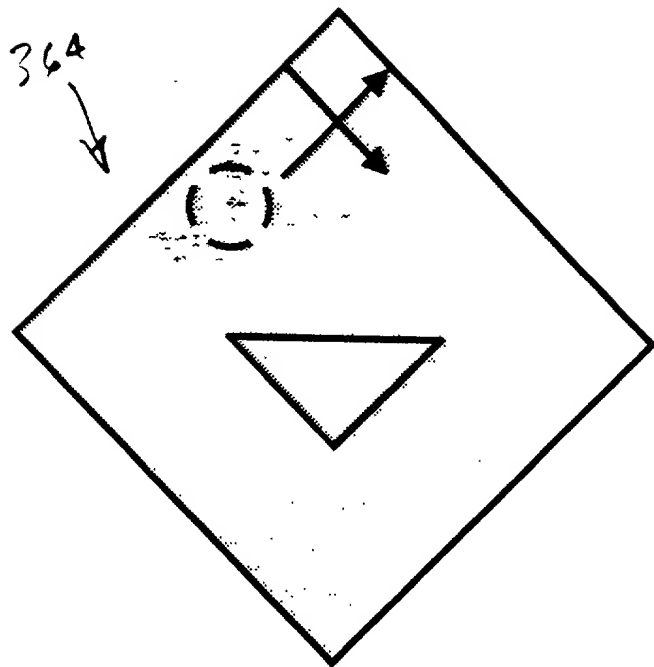


Fig. 8



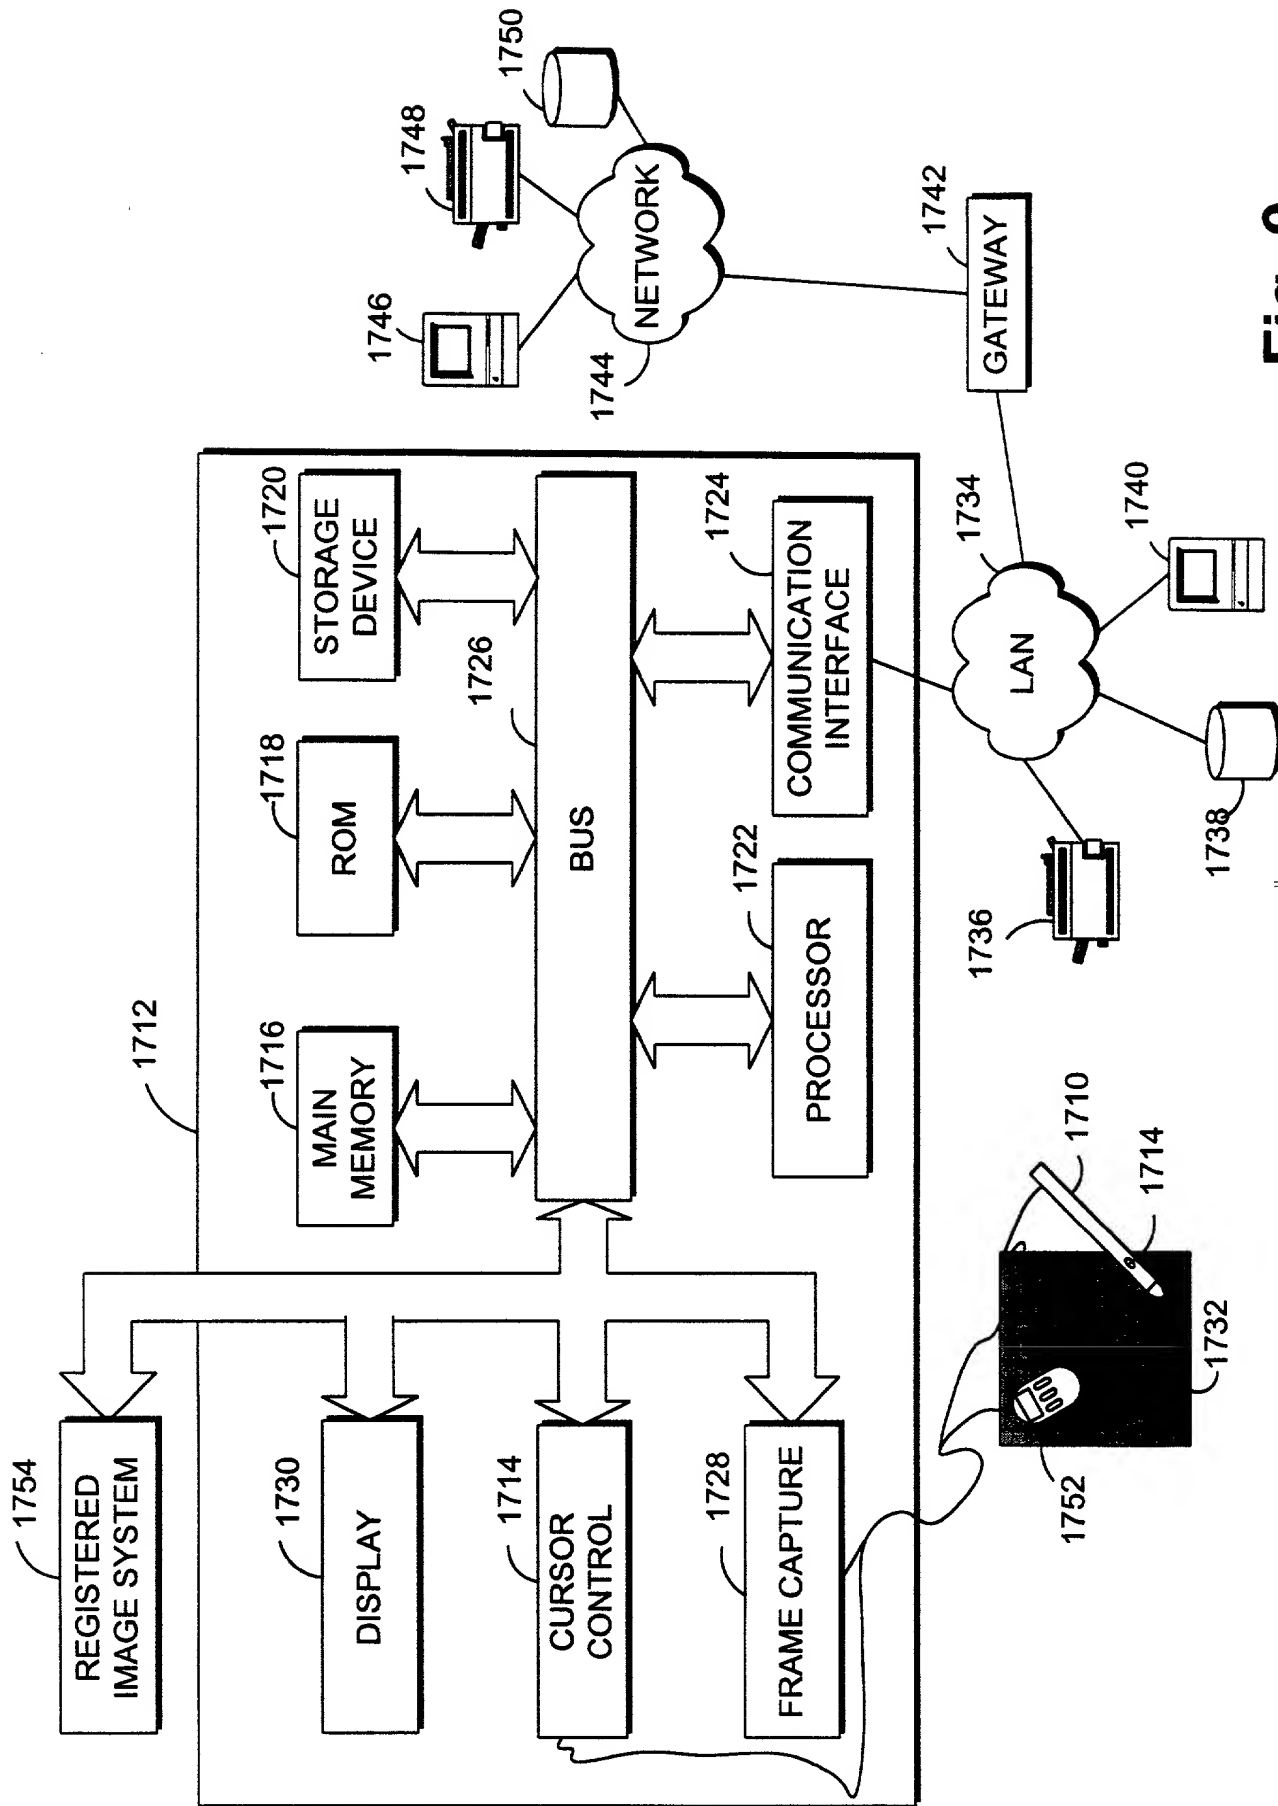


Fig. 9

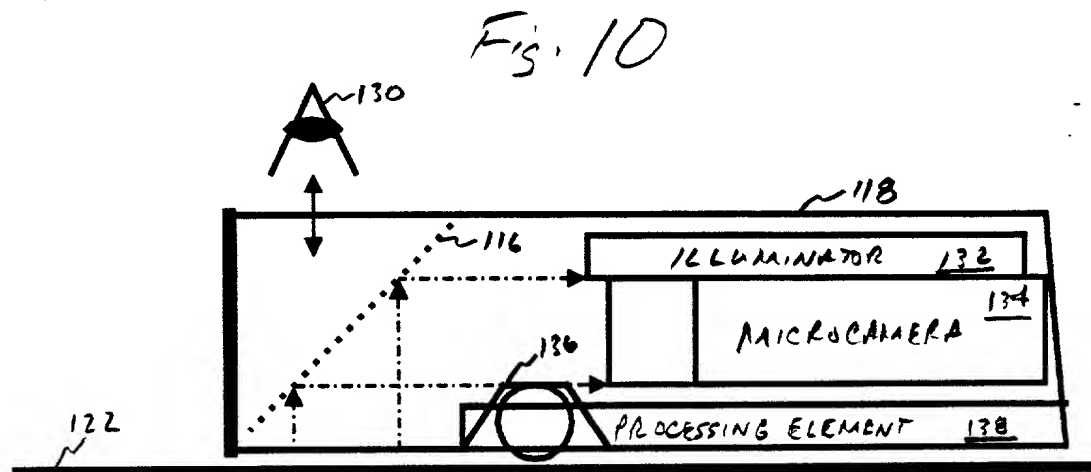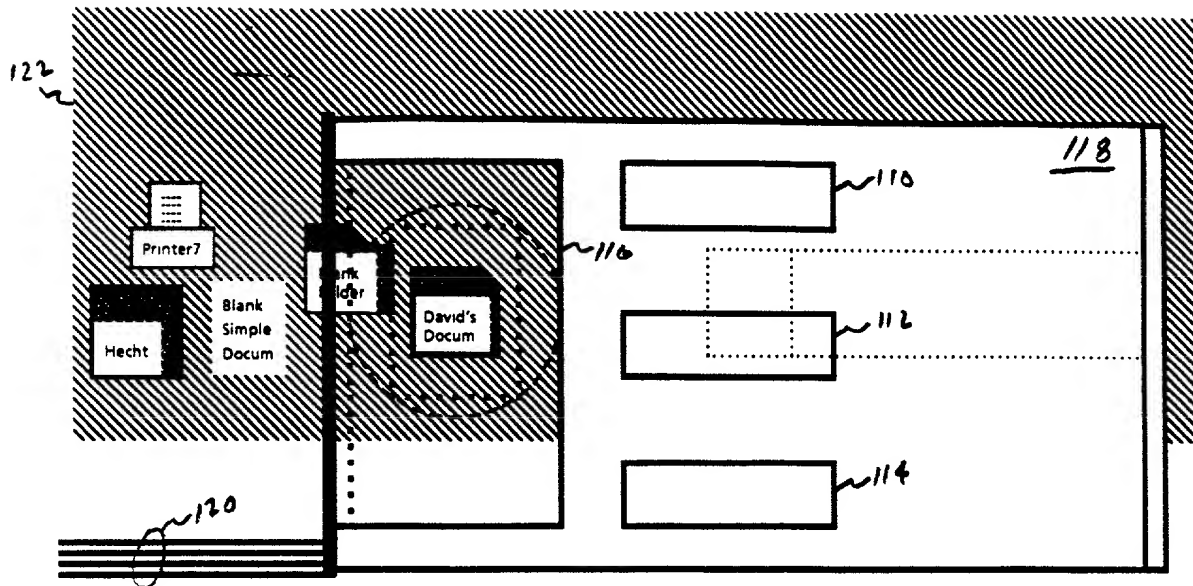

122 ~

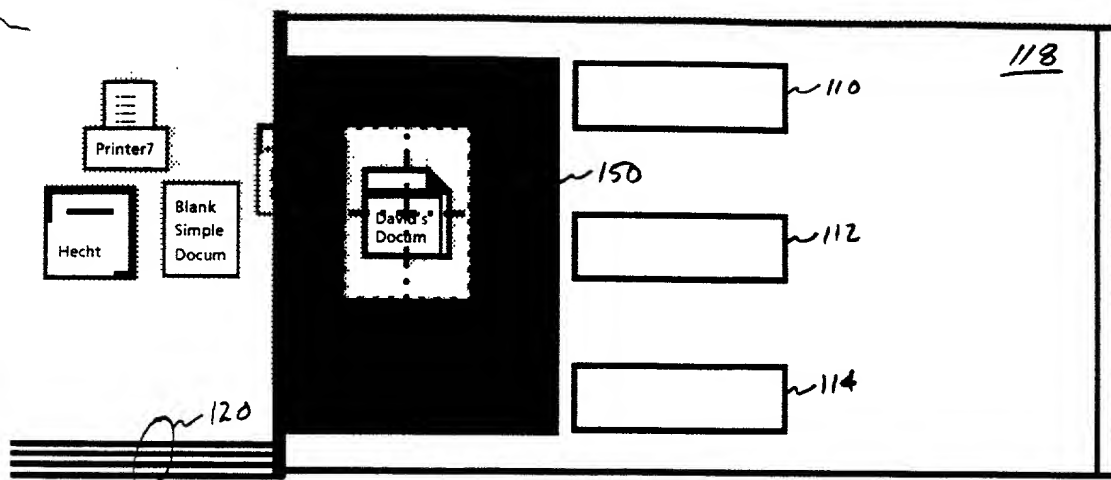


Fig. 12

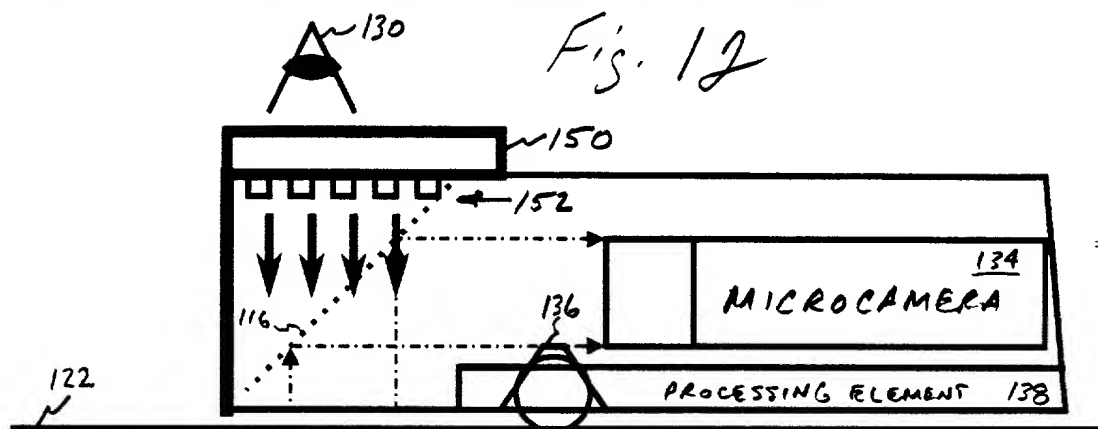


Fig. 13

122

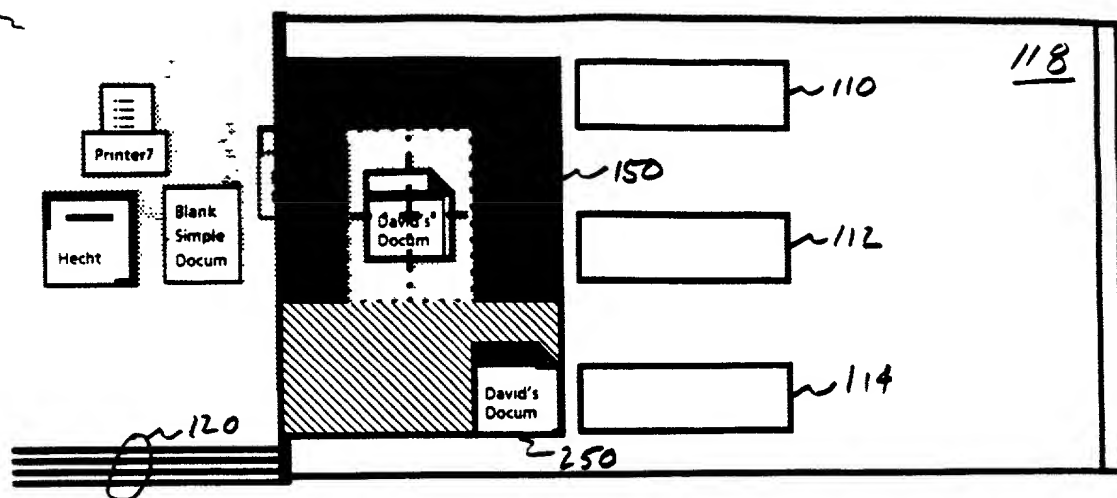


Fig. 14

122

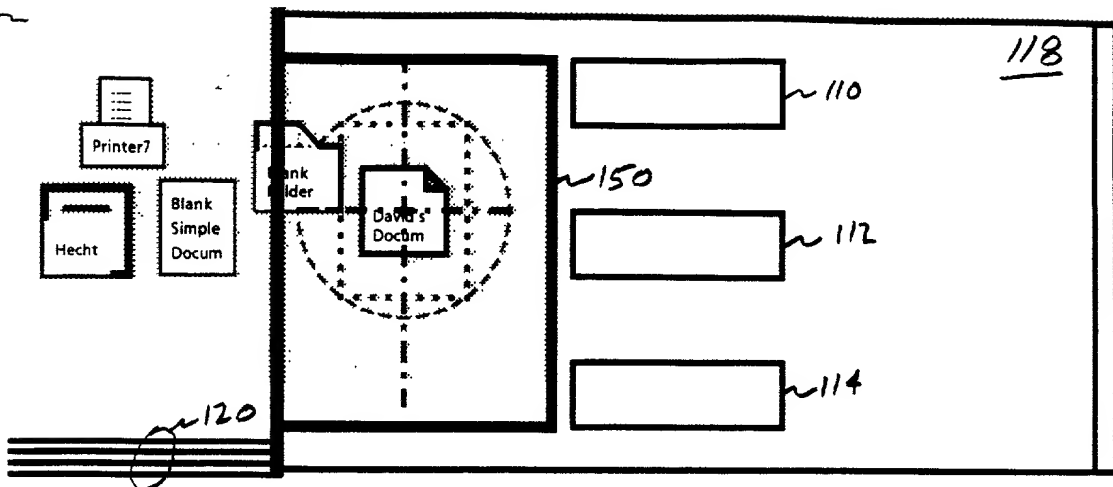


Fig. 15

122

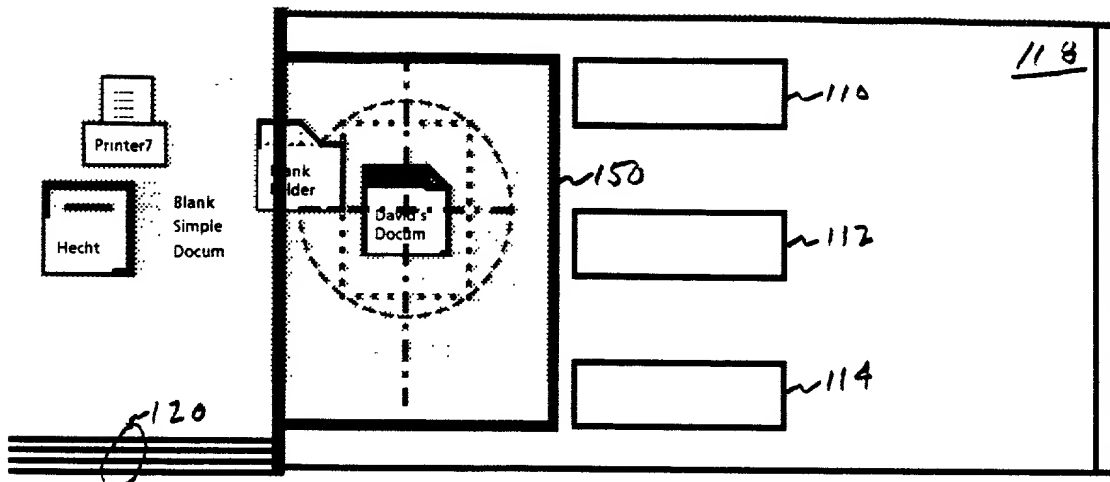


Fig. 16

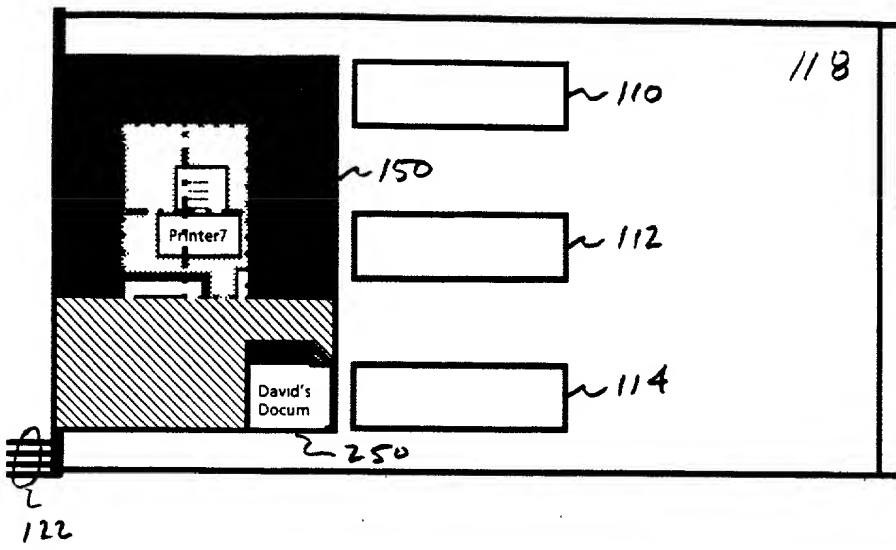


Fig. 17

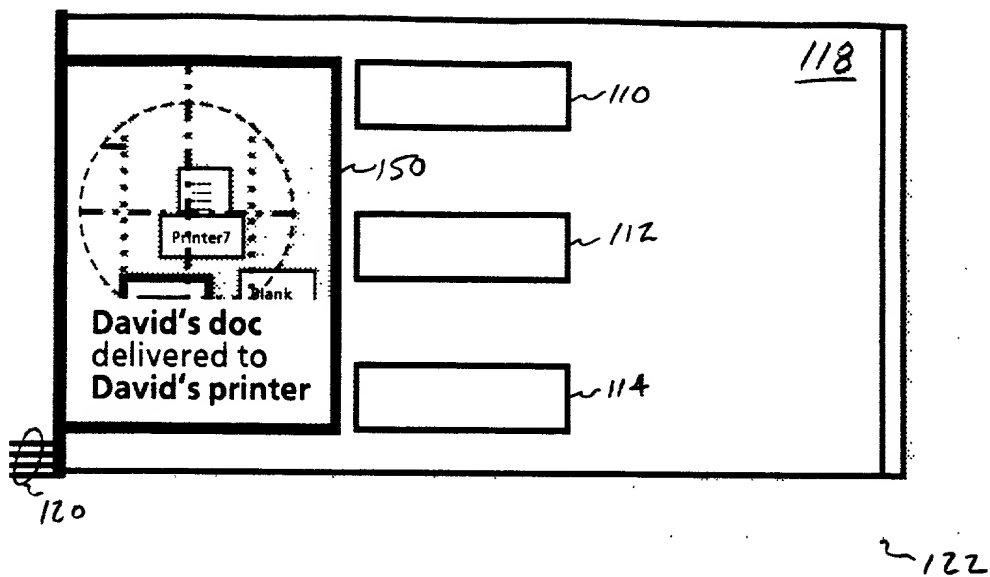


Fig. 18

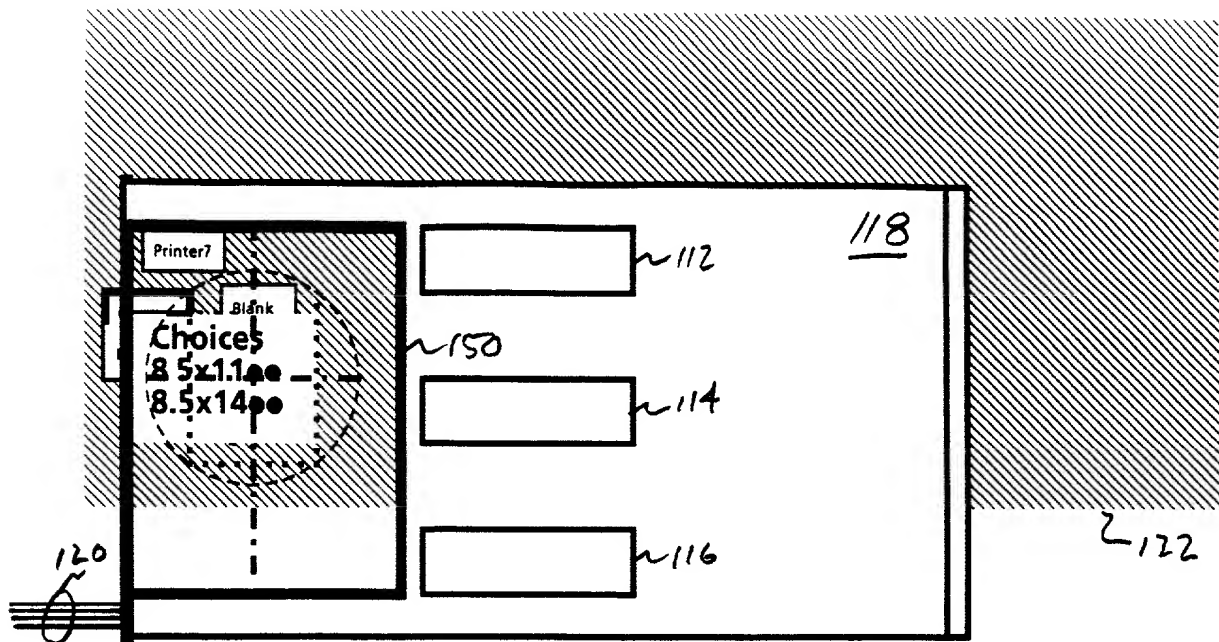


Fig. 19

122

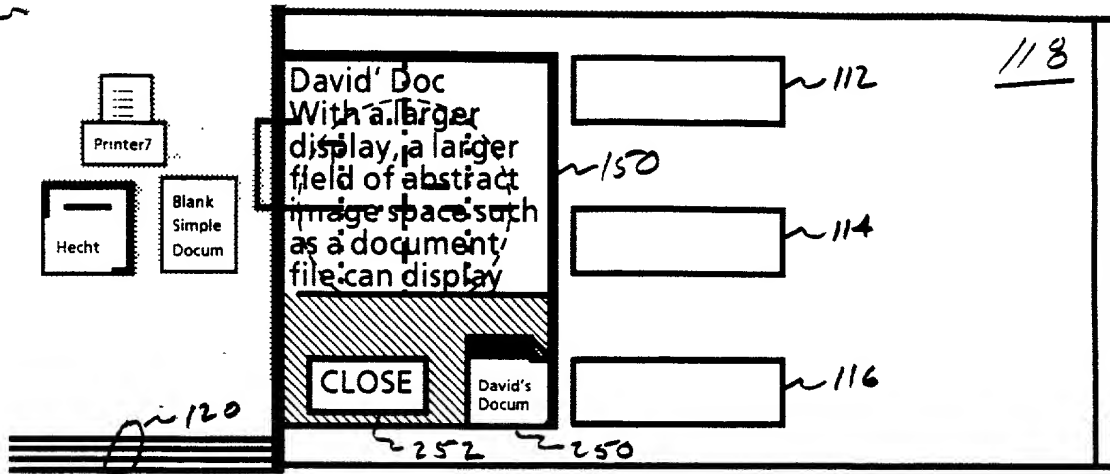


Fig. 20

122 ~

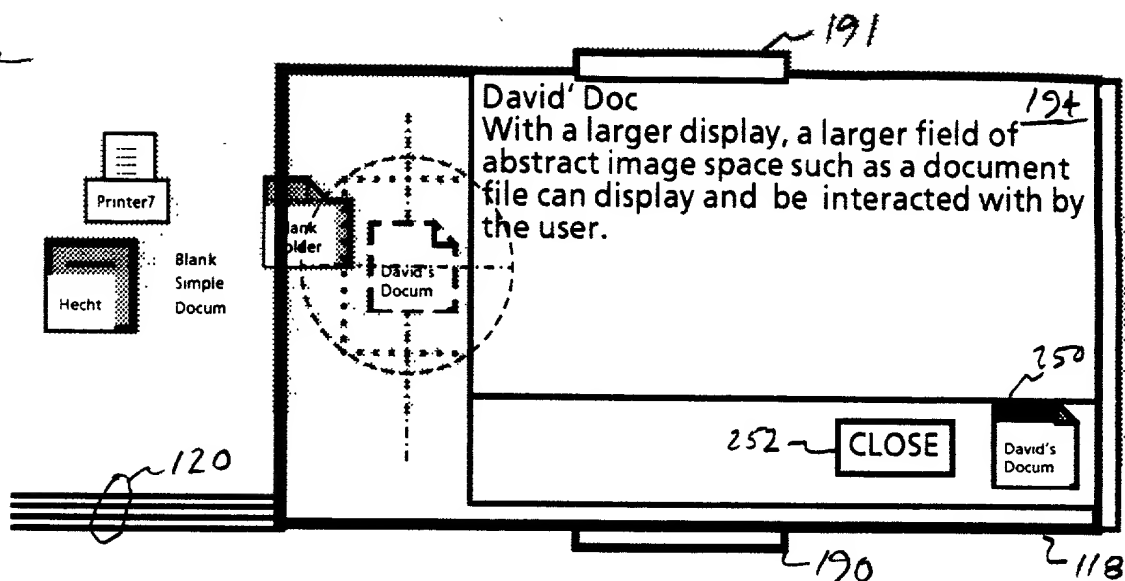


Fig. 21

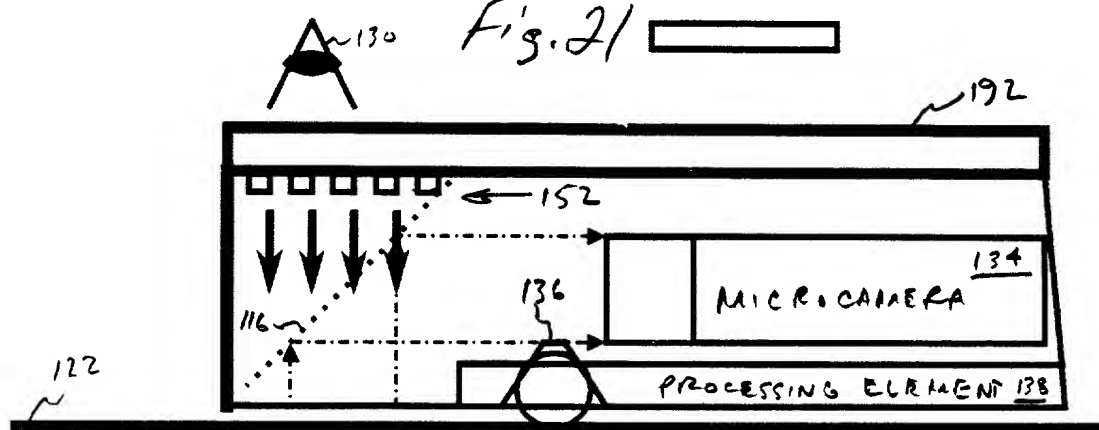


Fig. 22

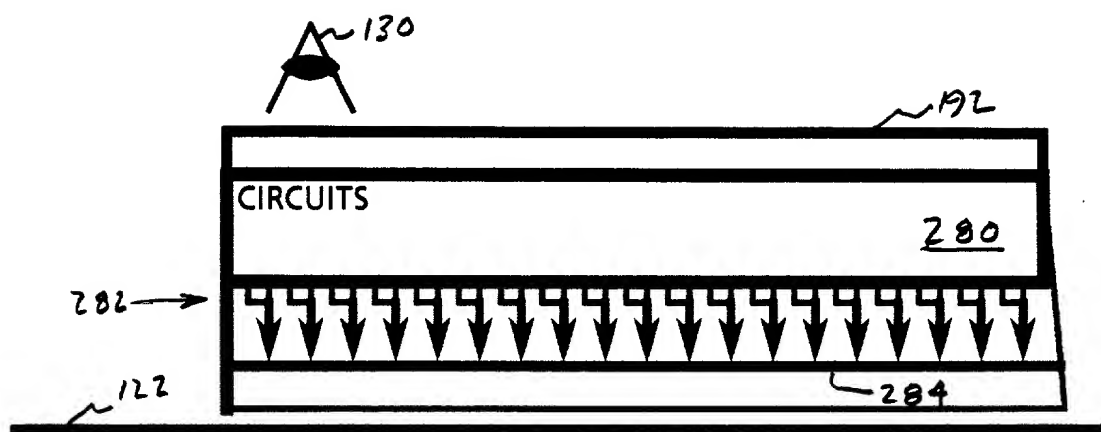



Fig. 23

300

1990's

al documents

THE

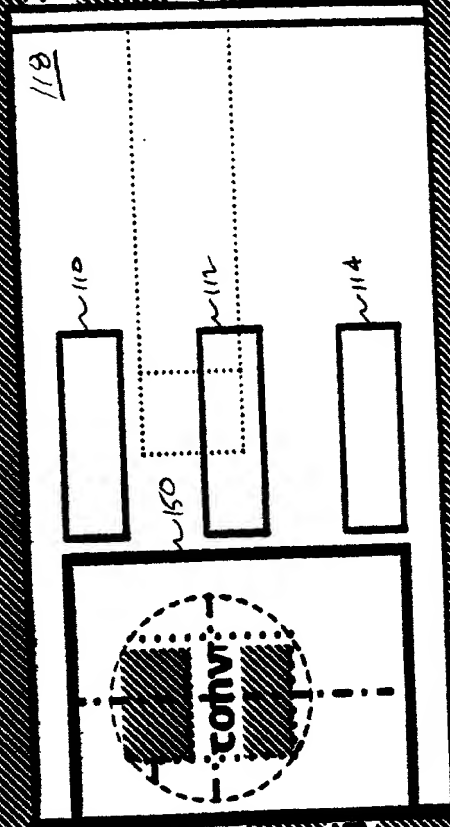

in the
will be
as we

Fig. 24

300

A00 A02 A03 A04 A05 A06 A07 A08 A09 A10 A11 A12 A13 A14 A15 A16 A17 A18 A19 A20 A22 A23 A24 A25 A26 A27 A28 A29
B00 B02 B03 B04 B05 B06 B07 B08 B09 B10 B11 B12 B13 B14 B15 B16 B17 B18 B19 B20 B22 B23 B24 B25 B26 B27 B28 B29
C00 C02 C03 C04 C05 C06 C07 C08 C09 C10 C11 C12 C13 C14 C15 C16 C17 C18 C19 C20 C22 C23 C24 C25 C26 C27 C28 C29
D00 D01
E00 E01 E02 E03 E04 E05 E06 E07 E08 E09 E10 E11 E12 E13 E14 E15 E16 E17 E18 E19 E20 E22 E23 E24 E25 E26 E27 E28 E29
F00 F02 F03 F04 F05 F06 F07 F08 F09 F10 F11 F12 F13 F14 F15 F16 F17 F18 F19 F20 F22 F23 F24 F25 F26 F27 F28 F29
G00 G02 G03 G04
H00 H01
I00 I01
J00 J02 J03 J04
K00 K02 K03 K04
L00 L02 L03 L04
M00 M01
N00 N02 N03 N04
O00 O02 O03 O04
P00 P02 P03 P04
Q00 Q01
R00 R01
S00 S02 S03 S04
T00 T02 T03 T04
U00 U02 U03 U04

The critical customer requirement and Xerox advantage

118

110

112

114

150

152

154

156

158

160

162

164

166

168

170

172

174

176

178

180

182

184

186

188

190

192

194

196

198

200

202

204

206

208

210

212

214

216

218

220

222

224

226

228

230

232

234

236

238

240

242

244

246

248

250

252

254

256

258

260

262

264

266

268

270

272

274

276

278

280

282

284

286

288

290

292

294

296

298

300

302

304

306

308

310

312

314

316

318

320

322

324

326

328

330

332

334

336

338

340

342

344

346

348

350

352

354

356

358

360

362

364

366

368

370

372

374

376

378

380

382

384

386

388

390

392

394

396

398

400

402

404

406

408

410

412

414

416

418

420

422

424

426

428

430

432

434

436

438

440

442

444

446

448

450

452

454

456

458

460

462

464

466

468

470

472

474

476

478

480

482

484

486

488

490

492

494

496

498

500

502

504

506

508

510

512

514

516

518

520

522

524

526

528

530

532

534

536

538

540

542

544

546

548

550

552

554

556

558

560

562

564

566

568

570

572

574

576

578

580

582

584

586

588

590

592

594

596

598

600

602

604

606

608

610

612

614

616

618

620

622

624

626

628

630

632

634

636

638

640

642

644

646

648

650

652

654

656

658

660

662

664

666

668

670

672

674

676

678

680

682

684

686

688

690

692

694

696

698

700

702

704

706

708

710

712

714

716

718

720

722

724

726

728

730

732

734

736

738

740

742

744

746

748

750

752

754

756

758

760

762

764

766

768

770

772

774

776

778

780

782

784

786

788

790

792

794

796

798

800

802

804

806

808

810

812

814

816

818

820

822

824

826

828

830

832

834

836

838

840

842

844

846

848

850

852

854

856

858

860

862

864

866

868

870

872

874

876

878

880

882

884

886

888

890

892

894

896

898

900

902

904

906

908

910

912

914

916

918

920

922

924

926

928

930

932

934

936

938

940

942

944

946

948

950

952

954

956

958

960

962

964

966

968

970

972

974

976

978

980

982

984

986

988

990

992

994

996

998

1000

al documents

!!!!!!

S23 S24 S25 S26 S27 S28 S29
23 T24 T25 T26 T27 T28 T29
18 U19 U20 U22 U23 U24 U25 U26

Fig. 25

300

The critical customer requirement and Xerox advantage

in the document

118

110

150

will be to convert

112

as we intend to do

114

1990's

al documents

!!!!!!!!!!!!

Fig. 26

300

The critical customer requirement and Xerox advantage

in the document processing markets of the 1990's
will be to convert paper documents into digital documents
as we intend to do!!!!!!!!!!!!!!!!!!!!!!!!!!!!

Fig. 27


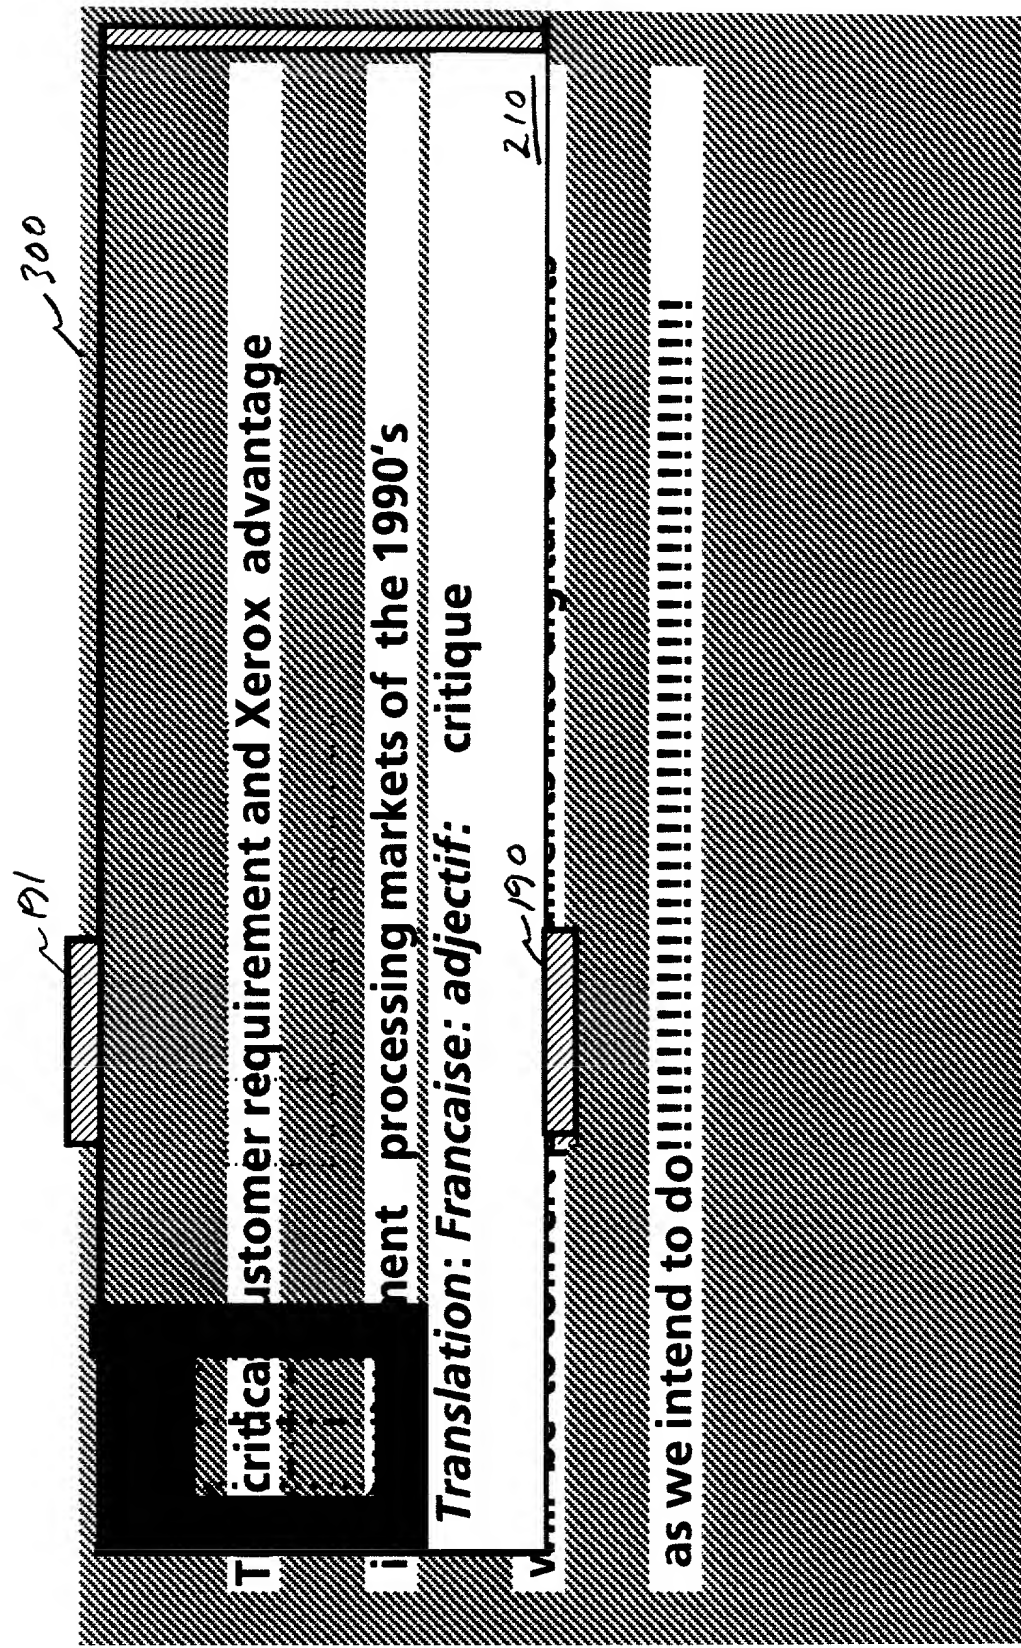


Fig. 28

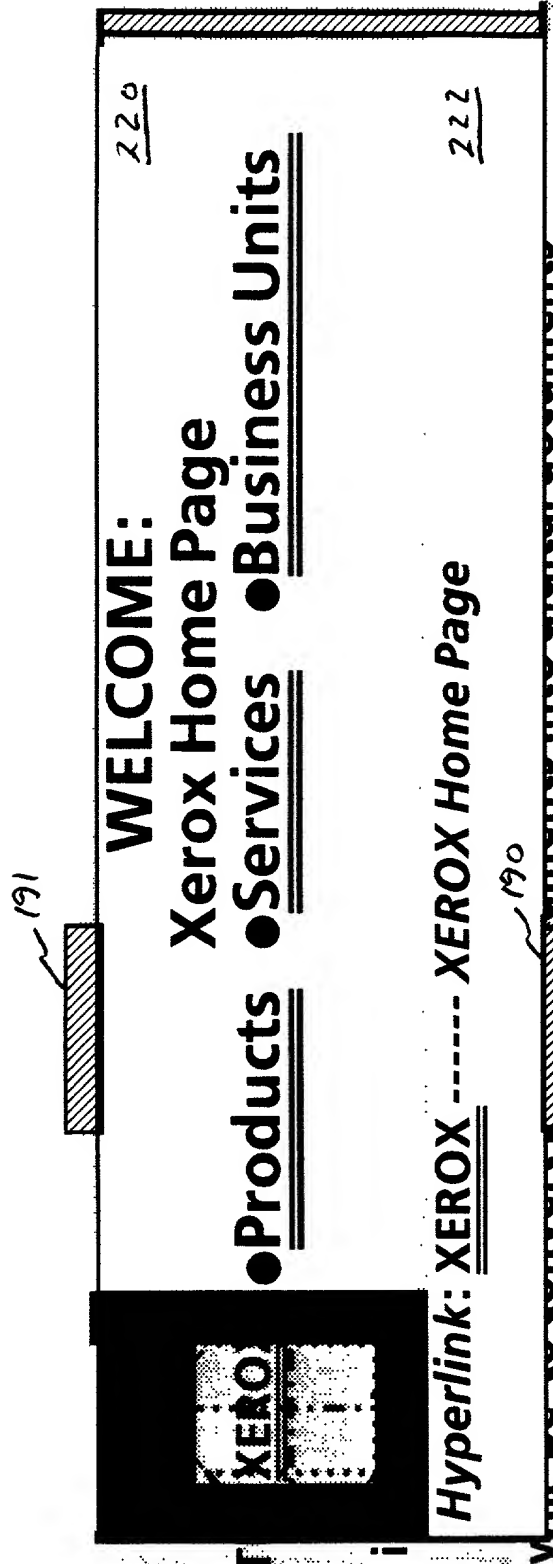

as we intend to do!!

Fig. 29